

The logo for NEXORA FLOORING. The word "NEXORA" is in a bold, white, sans-serif font. The "X" is stylized with a red diagonal stroke. Below "NEXORA" is the word "FLOORING" in a smaller, red, sans-serif font. The entire logo is flanked by two horizontal red lines.

NEXORA

FLOORING

COLLECTION **2026**

**VERSATILE AND
DURABLE SURFACE SOLUTIONS.**

Our floors are designed to withstand stain and scratches while also being fire retardant, easy to clean and 100% waterproof. Additionally they are environment friendly as they can be easily recycled.





Experience unmatched comfort and quietness as our 100% Waterproof LVT Flooring is designed to reduce noise, creating a peaceful ambiance in your home or workspace. Along with that, It has many qualities like being water proof, low maintenance, kid-friendly, pet-friendly, and quick to install.

So, Don't compromise on quality – choose our 100% Waterproof LVT Flooring for the best quality at the best price at Nexora Flooring.

ADVANTAGE

Our 100% WATERPROOF SPC flooring combines strength, style, and comfort. Its rigid core makes it ultra-durable, fully waterproof, and resistant to scratches and stains. With natural-looking designs, low maintenance, and excellent sound reduction, it's the perfect blend of performance and elegance for any space.



Easy
to Clean



Real to
touch texture



Low
Maintenance



High
Dimensional
Stability



100%
waterproof



No Termite
No Bugs



Fire
Retardant



Scratch &
Stain
Resistant



Excellent
Acoustic



Easy Quick
Installation

LOCKING SYSTEM

Our patented uniclic locking system allows quick, secure, and glue-free installation. Each plank locks tightly in place, ensuring a stable, gap-free, and moisture-resistant finish.

SURFACE

EMBOSSED WITH DOUBLE
COAT UV FINISH



INTERLOCK

100% WATERPROOF
UNICLIC LOCKING



BEVEL

FOUR SIDE
MICRO BEVEL




UNDERLAYMENT

IXPE
FOR SILENCE AND COMFORT



PRODUCT

Structure

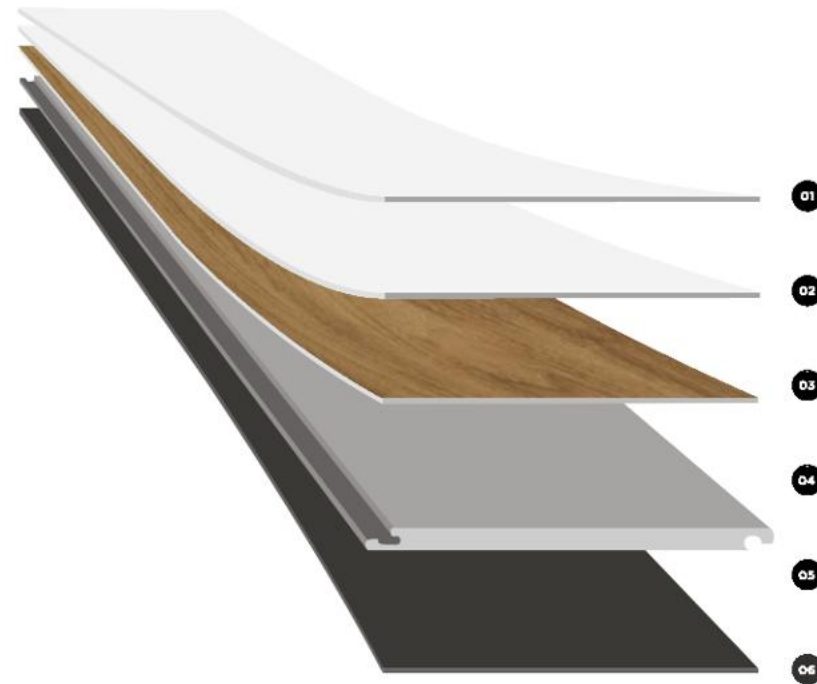

01 UV Coating

It is the topmost layer of our 100% Waterproof LVT floors. A UV-cured coating is applied to the surface of the flooring and hardened using UV light. This layer provides added protection against fading, or discolouration caused by exposure to sunlight. This layer also renders a stain-free quality and is responsible for the matt finish.

02 Wear Layer

Wear Layer on the flooring is a clear, protective layer that is applied on top of the design layer. It is made of a durable material that helps to resist scratches and wear from foot traffic. This layer is important because it helps to prolong the life of the flooring and keep it looking new for longer.

03 PVC Decorative Layer

The decor film layer on 100% Waterproof LVT floors is a thin, printed layer that is applied on top of the core layer. The decor film layer is important because it gives the flooring its aesthetic appeal, allowing it to mimic the look of natural wood or other materials while providing the durability and resistance of 100% Waterproof LVT.

04 100% Waterproof LVT


The core layer of the floors is the main structural layer made from a mixture of polymer Resin and Natural stone composition, which gives it strength and stability and also contributes to its waterproof property. The core layer is also dense and stable, it makes the flooring much more durable and resistant to wear and tear compared to traditional vinyl flooring.

05 UNICLIC[®] Locking Technology

This Unique Feature Makes the 100% Waterproof LVT floors so easy to install and DIY-friendly. Our flooring has a patented locking mechanism (Uniclic) which allows a floating installation and keeps the floors attached more effectively. This layer also ensures that no adhesives or materials are required for installation.

06 Underlayment

This layer contributes to additional cushioning stability and sound insulation for the flooring. It is typically made of high-density IXPE or EVA attached underneath the core.

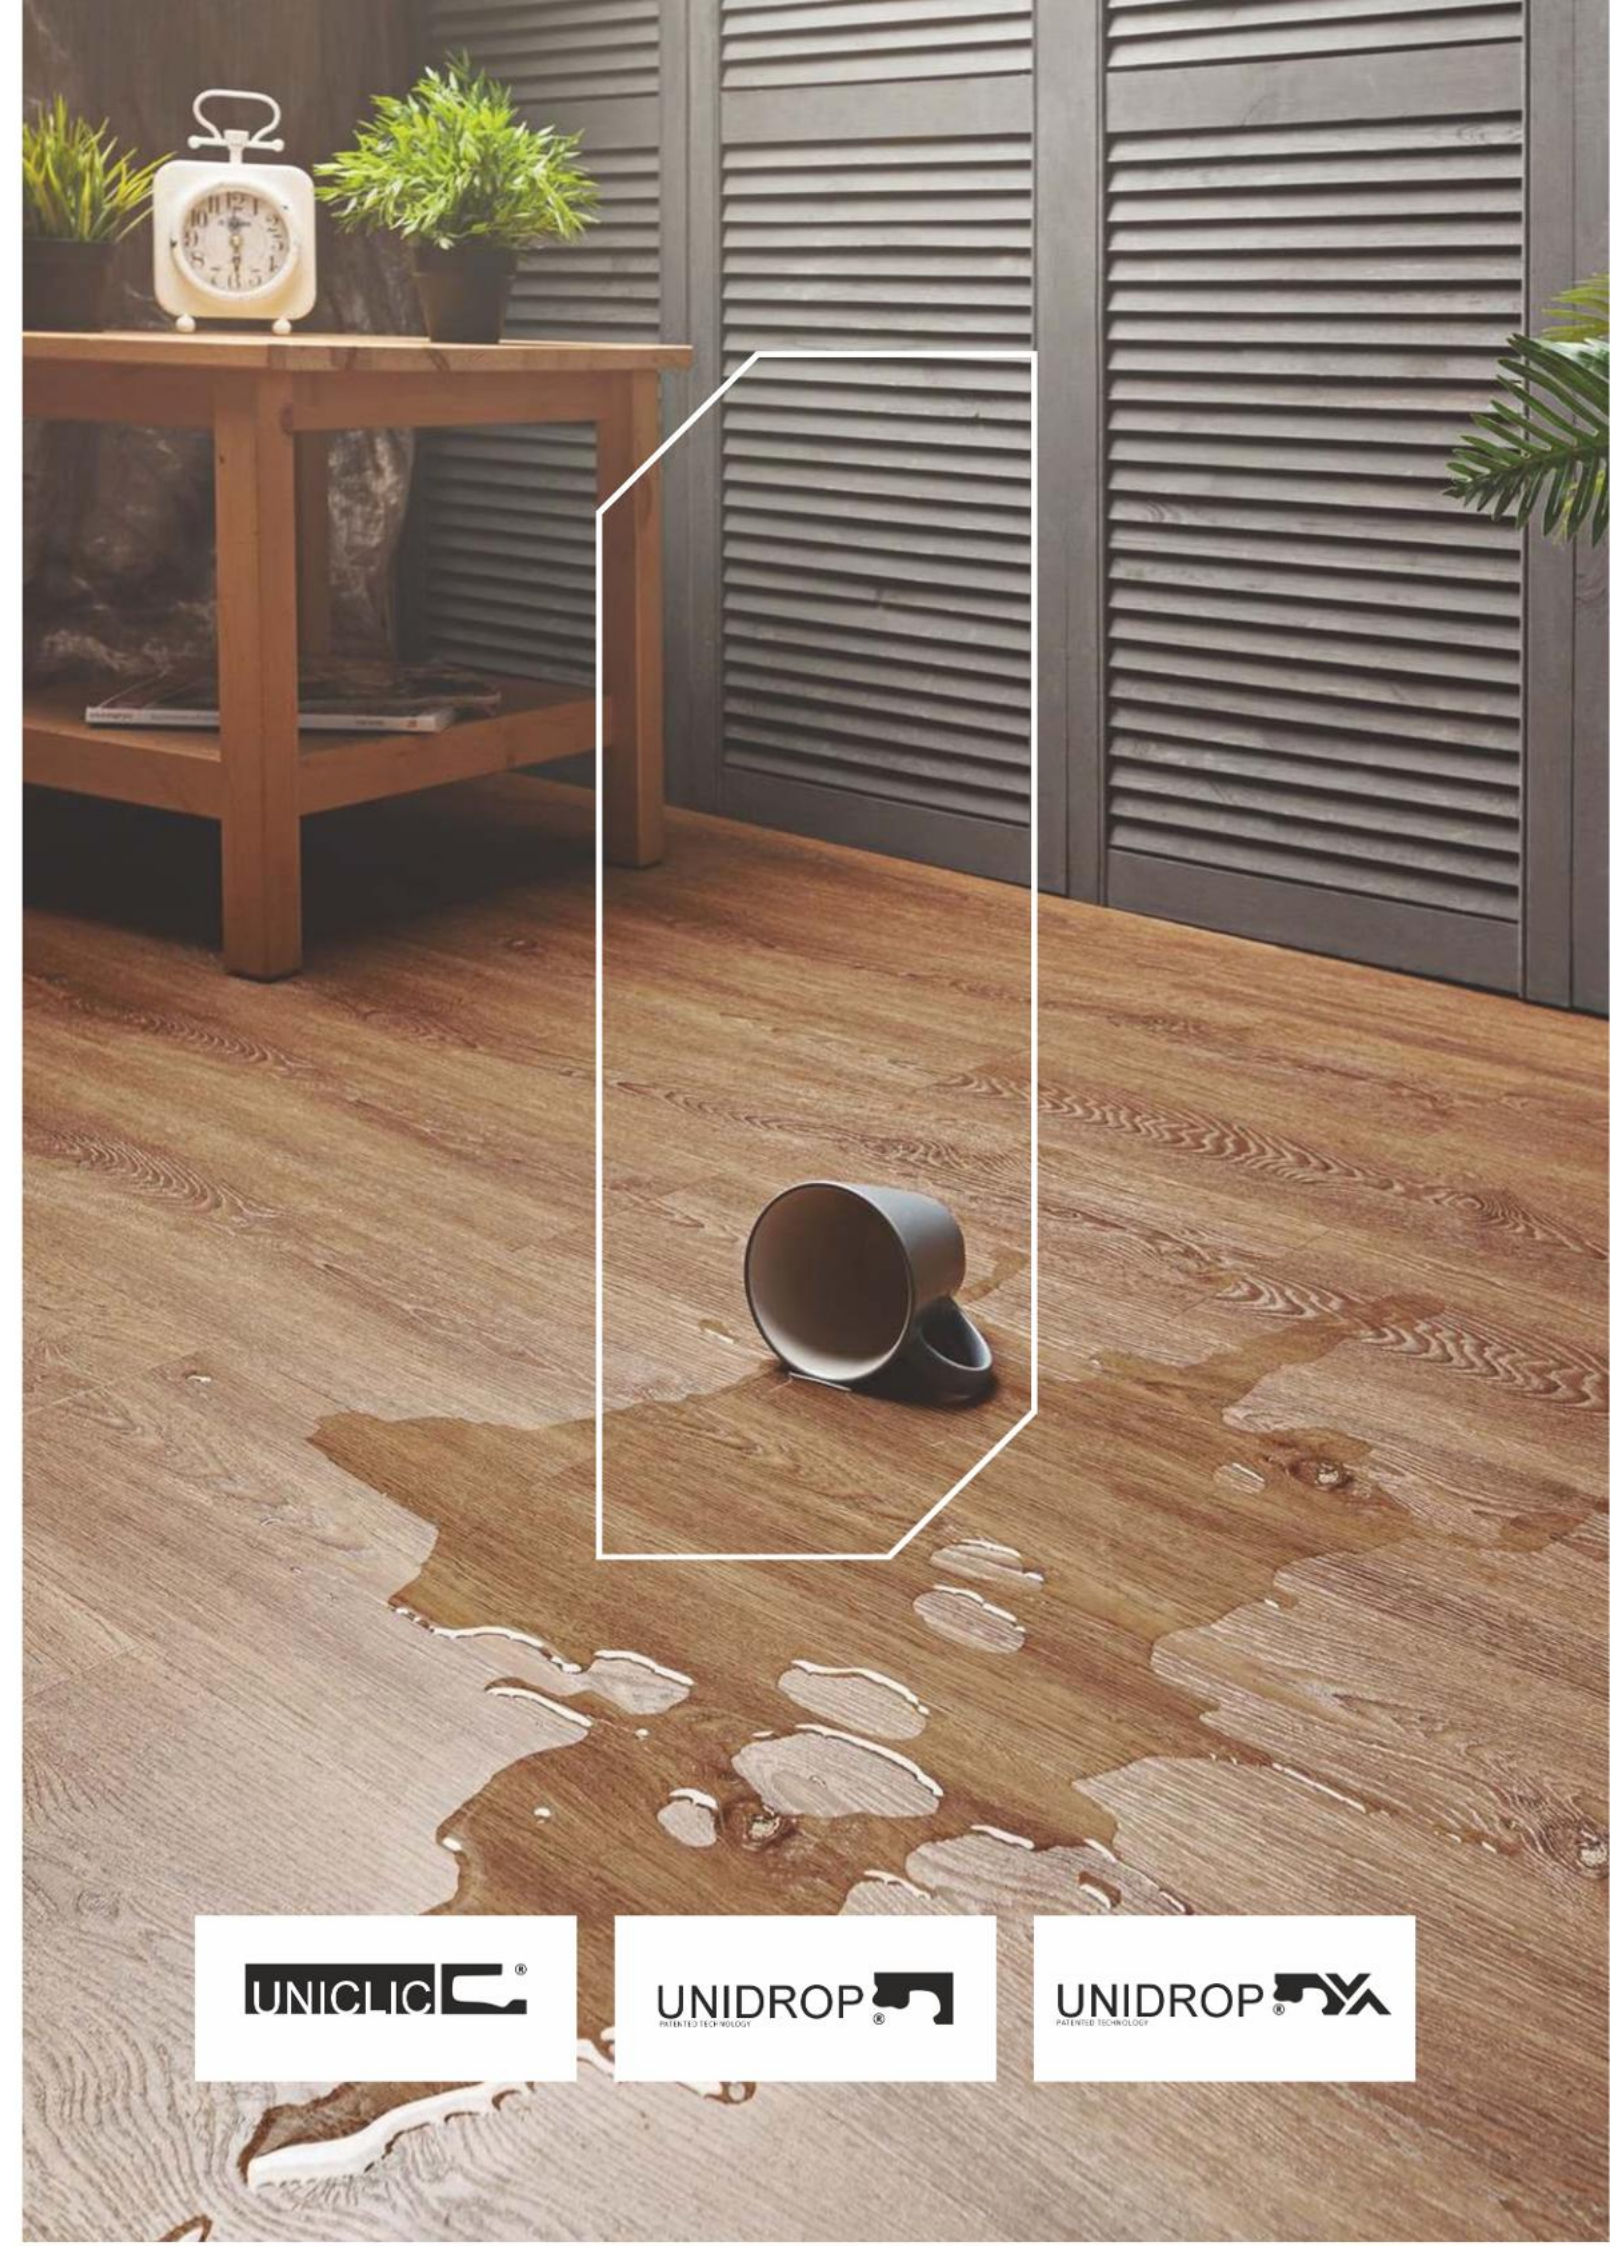



UNICLIC[®]

UNIDROP[®]

UNIDROP[®]



**PRODUCT
SIZES**

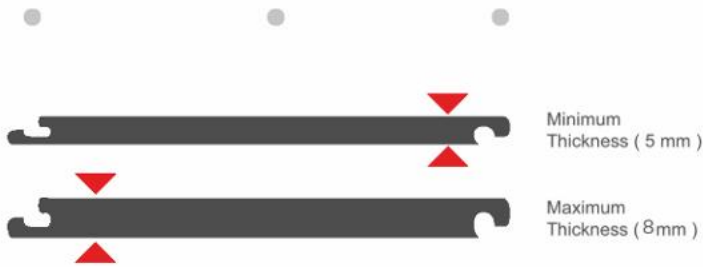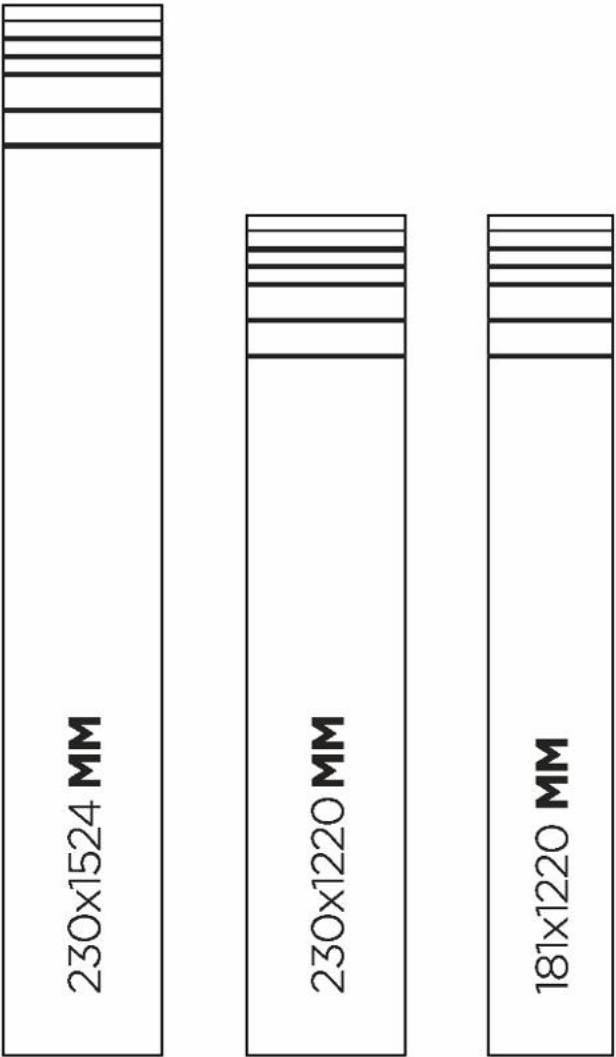

LUXE
COLLECTION

It's a perfect mimic of the look and feel of natural materials yet more appealing and easy to maintain
compare to others natural flooring along with the same classy and elegant vibes.

AVAILABLE COLORS

LUXE
COLLECTION

GOLD OAK

WARM OAK

OAK ELEGANT

CLASSIC OAK

NATURAL OAK

ACACIA BROWN

EUCALYPTUS

VINTAGE OAK

NATURAL WALNUT

DARK PADAUK

ACACIA DARK





GOLD OAK

PRO
DETAILING

GOLD OAK

THICKNESS



MINIMUM THICKNESS : 5MM



MAXIMUM THICKNESS : 8MM

SURFACE

EMBOSSED WITH DOUBLE
COAT UV FINISH



BEVEL

FOUR SIDE
MICRO BEVEL



SIZES


181X1220 MM

● 230X1220 MM

● 230X1524 MM

FITTING

STRAIGHT RANDOM




INTERLOCK

100% WATERPROOF
UNICLIC LOCKING



UNDERLAYMENT

IXPE
FOR SILENCE AND COMFORT

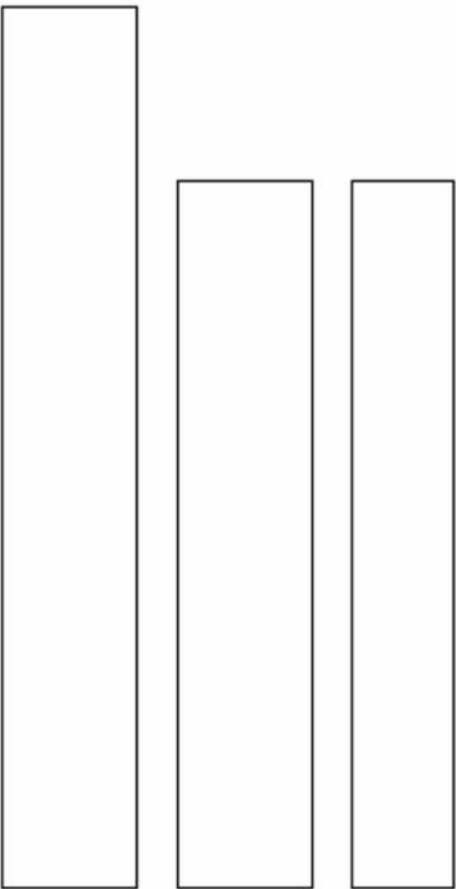

WARM OAK



PRO
DETAILING

SIZES

181X1220 MM

● 230X1220 MM

● 230X1524 MM

WARM OAK

THICKNESS



SURFACE

EMBOSSED WITH DOUBLE
COAT UV FINISH



BEVEL

FOUR SIDE
MICRO BEVEL



FITTING

STRAIGHT RANDOM




INTERLOCK

100% WATERPROOF
UNICLIC LOCKING



UNDERLAYMENT

IXPE
FOR SILENCE AND COMFORT

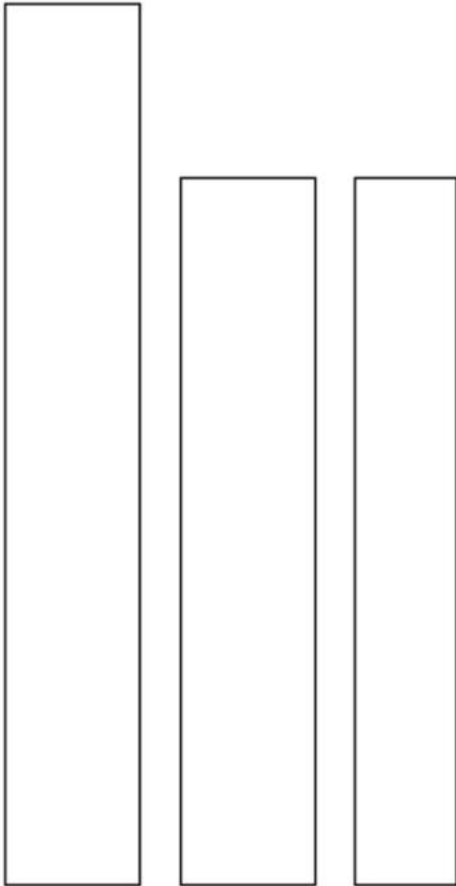

OAK ELEGANT



OAK ELEGANT

PRO
DETAILING

SIZES

181X1220 MM

● 230X1220 MM

● 230X1524 MM

THICKNESS



MINIMUM THICKNESS : 5MM



MAXIMUM THICKNESS : 8MM

SURFACE

EMBOSSED WITH DOUBLE
COAT UV FINISH




BEVEL

FOUR SIDE
MICRO BEVEL



FITTING

STRAIGHT RANDOM



INTERLOCK

100% WATERPROOF
UNICLIC LOCKING



UNDERLAYMENT

IXPE
FOR SILENCE AND COMFORT



CLASSIC OAK



PRO
DETAILING

SIZES

- 181X1220 MM
- 230X1220 MM
- 230X1524 MM

CLASSIC OAK

THICKNESS




SURFACE



BEVEL



FITTING

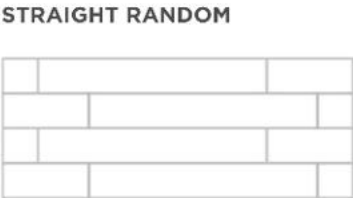

INTERLOCK



UNDERLAYMENT



NATURAL OAK



PRO
DETAILING

- SIZES**
- 181X1220 MM
 - 230X1220 MM
 - 230X1524 MM

NATURAL OAK

THICKNESS




SURFACE



BEVEL




FITTING

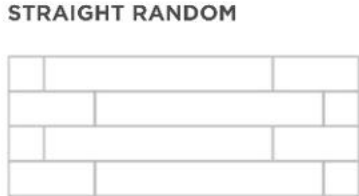

INTERLOCK



UNDERLAYMENT

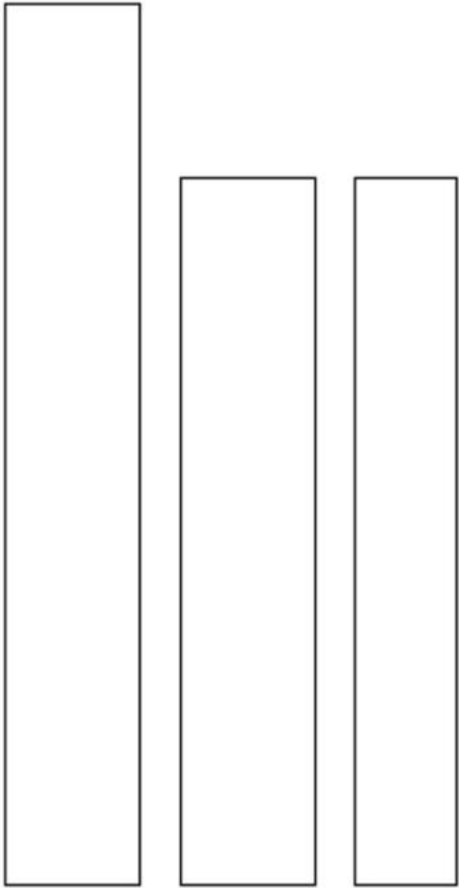

ACACIA BROWN



PRO
DETAILING

SIZES

- 181X1220 MM
- 230X1220 MM
- 230X1524 MM

ACACIA BROWN

THICKNESS



SURFACE

EMBOSSED WITH DOUBLE
COAT UV FINISH



BEVEL

FOUR SIDE
MICRO BEVEL



FITTING

STRAIGHT RANDOM



INTERLOCK

100% WATERPROOF
UNICLIC LOCKING



UNDERLAYMENT

IXPE
FOR SILENCE AND COMFORT



EUCALYPTUS



PRO
DETAILING

SIZES

- 181X1220 MM
- 230X1220 MM
- 230X1524 MM

EUCALYPTUS

THICKNESS



SURFACE

EMBOSSED WITH DOUBLE
COAT UV FINISH




BEVEL

FOUR SIDE
MICRO BEVEL



FITTING

STRAIGHT RANDOM



INTERLOCK

100% WATERPROOF
UNICLIC LOCKING



UNDERLAYMENT

IXPE
FOR SILENCE AND COMFORT



VINTAGE OAK



PRO
DETAILING

SIZES

- 181X1220 MM
- 230X1220 MM
- 230X1524 MM

VINTAGE OAK

THICKNESS



SURFACE

EMBOSSED WITH DOUBLE
COAT UV FINISH



BEVEL

FOUR SIDE
MICRO BEVEL



FITTING

STRAIGHT RANDOM



INTERLOCK

100% WATERPROOF
UNICLIC LOCKING



UNDERLAYMENT

IXPE
FOR SILENCE AND COMFORT



NATURAL WALNUT



PRO
DETAILING

NATURAL WALNUT

THICKNESS




SURFACE



BEVEL



FITTING

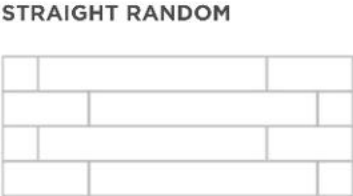

INTERLOCK




UNDERLAYMENT



SIZES

- 181X1220 MM
- 230X1220 MM
- 230X1524 MM

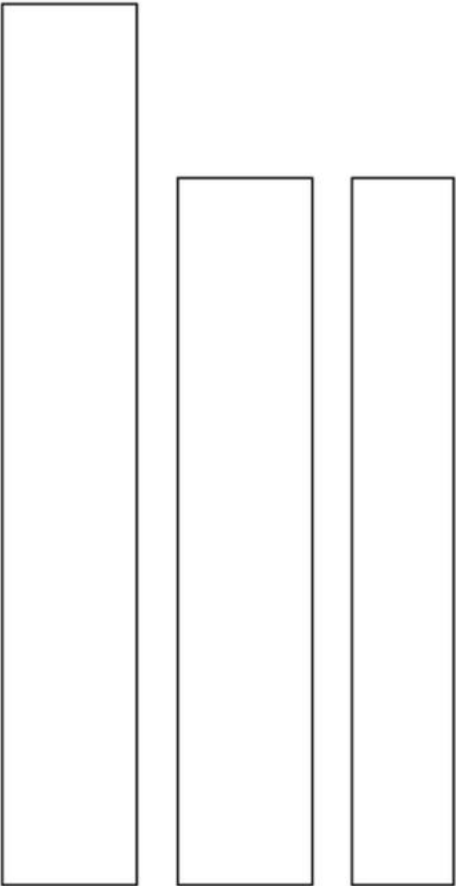

DARK PADAUK



PRO
DETAILING

DARK PADAUK

THICKNESS



SURFACE

EMBOSSED WITH DOUBLE
COAT UV FINISH



BEVEL

FOUR SIDE
MICRO BEVEL



SIZES

- 181X1220 MM
- 230X1220 MM
- 230X1524 MM

FITTING

STRAIGHT RANDOM




INTERLOCK

100% WATERPROOF
UNICLIC LOCKING



UNDERLAYMENT

IXPE
FOR SILENCE AND COMFORT

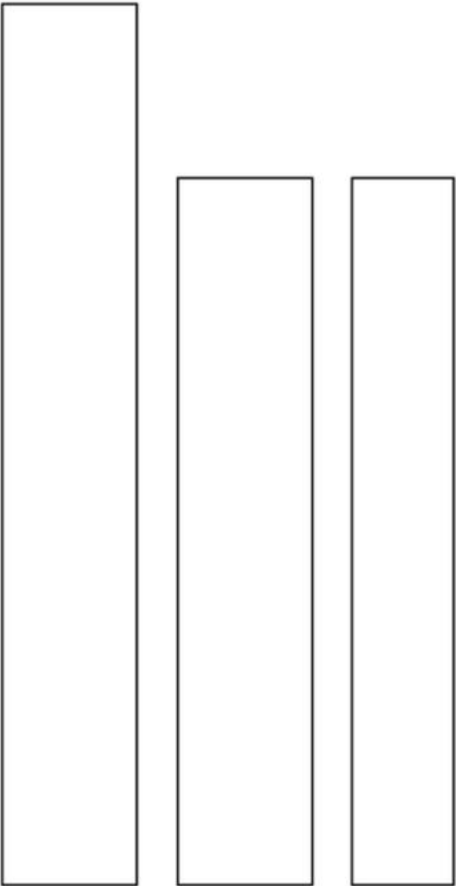

ACACIA DARK



PRO
DETAILING

SIZES

- 181X1220 MM
- 230X1220 MM
- 230X1524 MM

ACACIA DARK

THICKNESS




SURFACE



BEVEL




FITTING

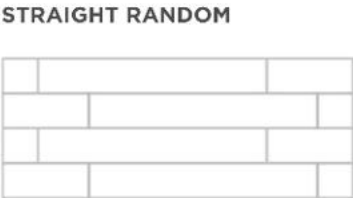

INTERLOCK



UNDERLAYMENT

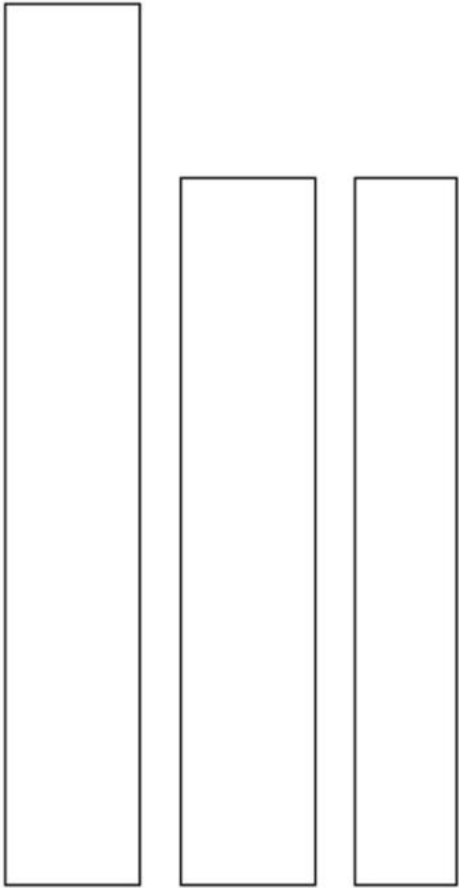

PRIME
COLLECTION



AVAILABLE
COLORS

PRIME
COLLECTION

GREY OAK	FANCY OAK
ASPEN WHITE	PARKHURST OAK
MAPLE BEIGE	MAPLE BROWN
COLUMBIA BEIGE	RUSTY BROWN
BEACHWOOD OAK	SESSILE OAK
PROTO OAK	EMORY OAK
ALPINE GREY	DALLAS BROWN
CHARNWOOD OAK	BOSTON GREY
SANDY OAK	ASH MIX
BOSTON NATURAL	CHICAGO GRIS
BLACKJACK OAK	PINE CHARCOAL



GREY OAK



GREY OAK

THICKNESS



SURFACE

EMBOSSED WITH DOUBLE
COAT UV FINISH



BEVEL

FOUR SIDE
MICRO BEVEL



FITTING

STRAIGHT RANDOM



INTERLOCK

100% WATERPROOF
UNICLIC LOCKING




UNDERLAYMENT

IXPE
FOR SILENCE AND COMFORT



SIZES

- 181X1220 MM
- 230X1220 MM
- 230X1524 MM

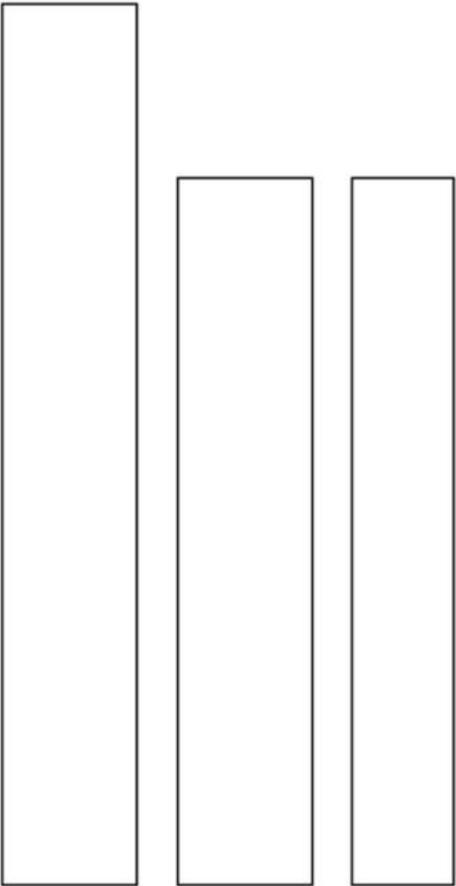

PRO
DETAILING



ASPEN WHITE

ASPEN WHITE

THICKNESS




SURFACE



BEVEL



FITTING

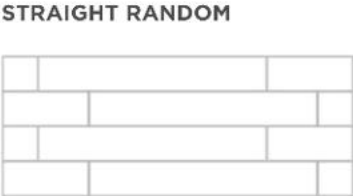

INTERLOCK




UNDERLAYMENT



SIZES

- 181X1220 MM
- 230X1220 MM
- 230X1524 MM

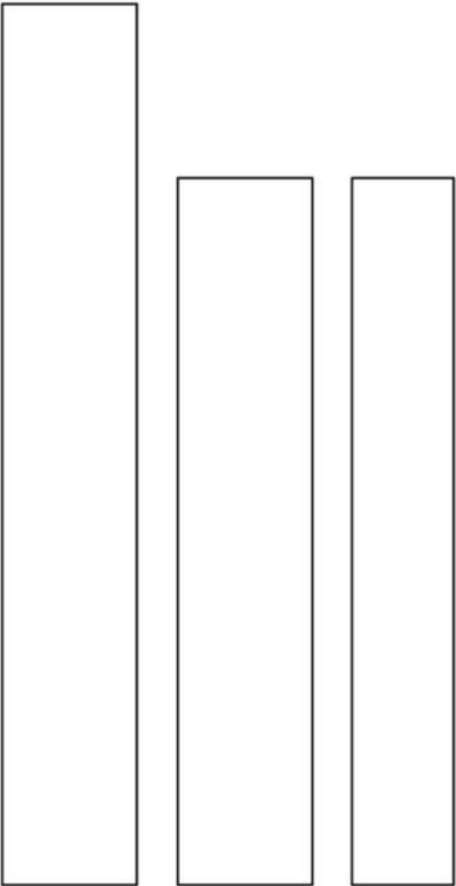

PRO
DETAILING

MAPLE BEIGE



MAPLE BEIGE

THICKNESS



SURFACE

EMBOSSED WITH DOUBLE
COAT UV FINISH



BEVEL

FOUR SIDE
MICRO BEVEL



FITTING

STRAIGHT RANDOM



INTERLOCK

100% WATERPROOF
UNICLIC LOCKING




UNDERLAYMENT

IXPE
FOR SILENCE AND COMFORT



SIZES

- 181X1220 MM
- 230X1220 MM
- 230X1524 MM

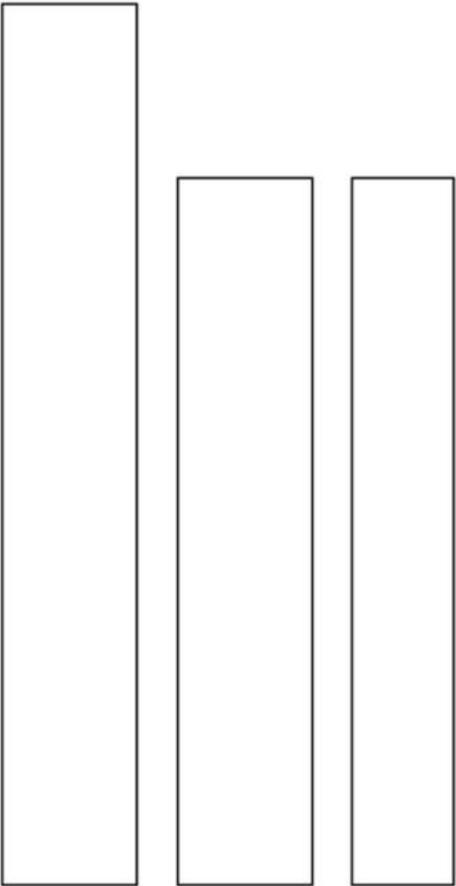

PRO
DETAILING



COLUMBIA BEIGIE

THICKNESS



SURFACE

EMBOSSED WITH DOUBLE
COAT UV FINISH



BEVEL

FOUR SIDE
MICRO BEVEL



FITTING

STRAIGHT RANDOM



INTERLOCK

100% WATERPROOF
UNICLIC LOCKING




UNDERLAYMENT

IXPE
FOR SILENCE AND COMFORT



SIZES

- 181X1220 MM
- 230X1220 MM
- 230X1524 MM

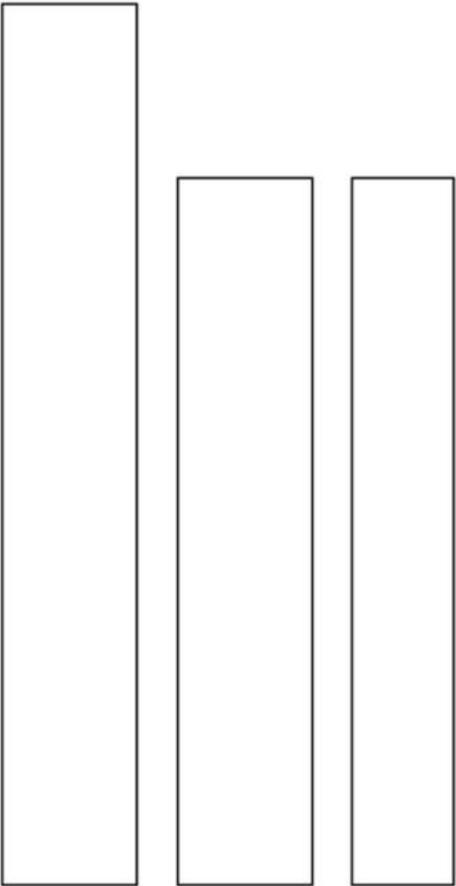

PRO
DETAILING

BEACHWOOD OAK



BEACHWOOD OAK

THICKNESS




SURFACE



BEVEL



FITTING

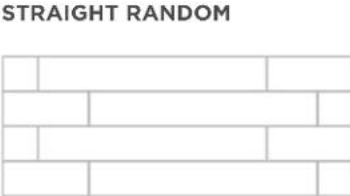

INTERLOCK





UNDERLAYMENT



SIZES

- 181X1220 MM
- 230X1220 MM
- 230X1524 MM

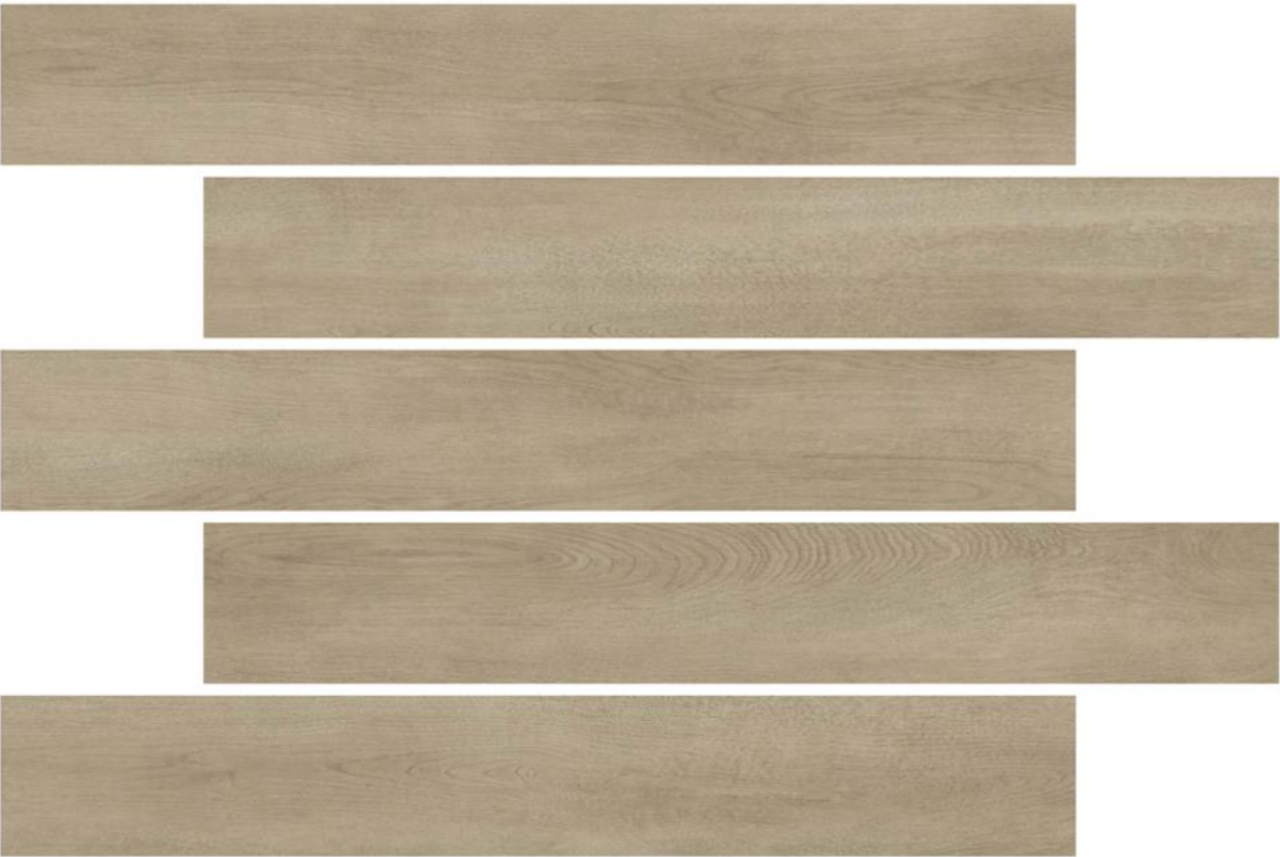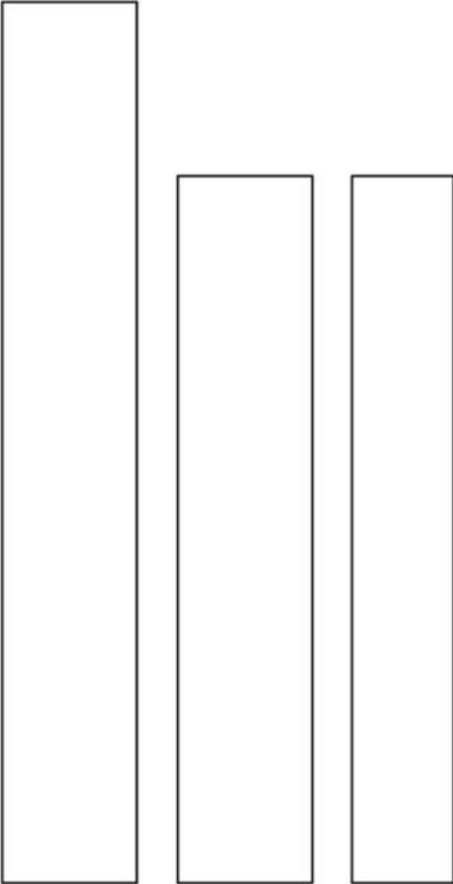

PRO
DETAILING

PROTO OAK



**PRO
DETAILING**

SIZES

- 181X1220 MM
- 230X1220 MM
- 230X1524 MM

PROTO OAK

THICKNESS



SURFACE

EMBOSSED WITH DOUBLE
COAT UV FINISH



BEVEL

FOUR SIDE
MICRO BEVEL



FITTING

STRAIGHT RANDOM



INTERLOCK

100% WATERPROOF
UNICLIC LOCKING



UNDERLAYMENT

IXPE
FOR SILENCE AND COMFORT





ALPINE GREY

PRO
DETAILING

ALPINE GREY

THICKNESS



SURFACE

EMBOSSED WITH DOUBLE
COAT UV FINISH



BEVEL

FOUR SIDE
MICRO BEVEL



SIZES

- 181X1220 MM
- 230X1220 MM
- 230X1524 MM

FITTING

STRAIGHT RANDOM





INTERLOCK

100% WATERPROOF
UNICLIC LOCKING



UNDERLAYMENT

IXPE
FOR SILENCE AND COMFORT

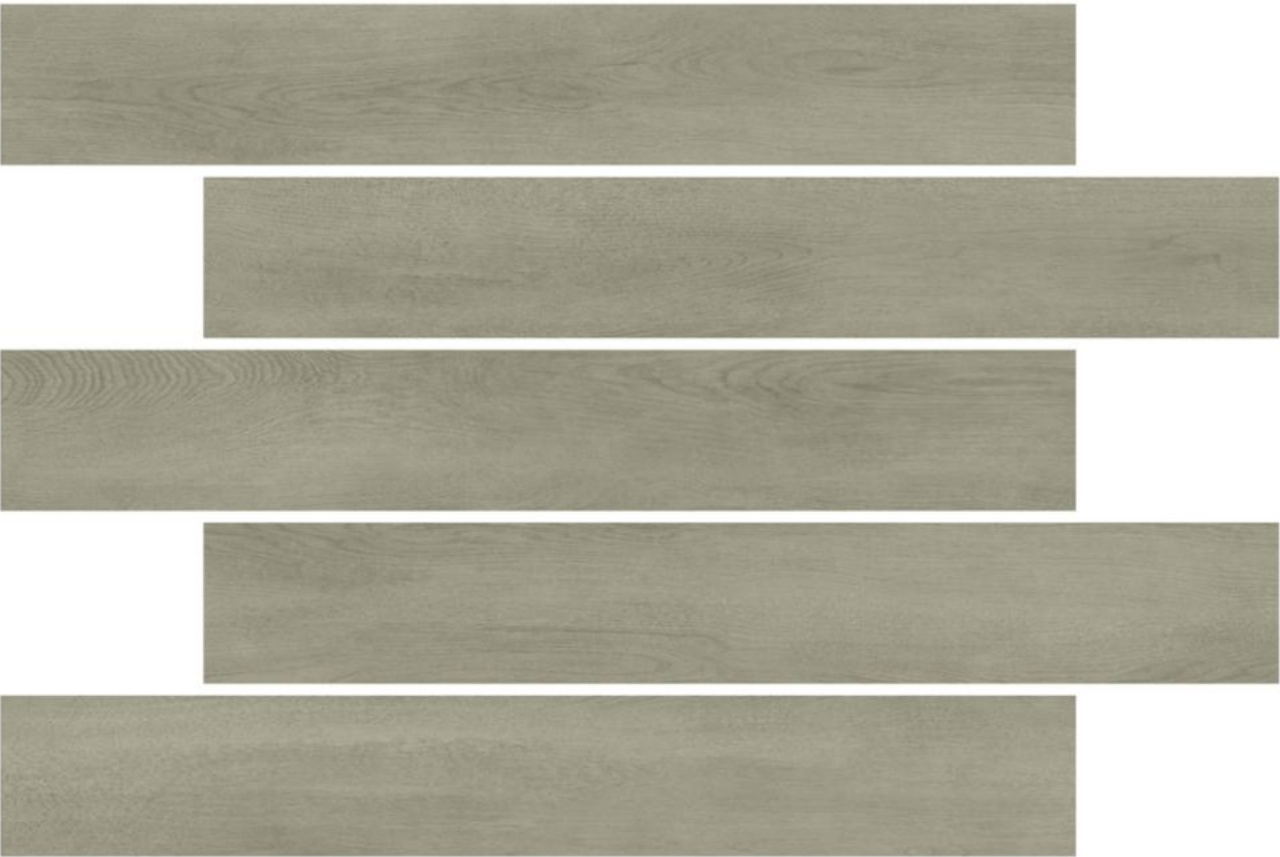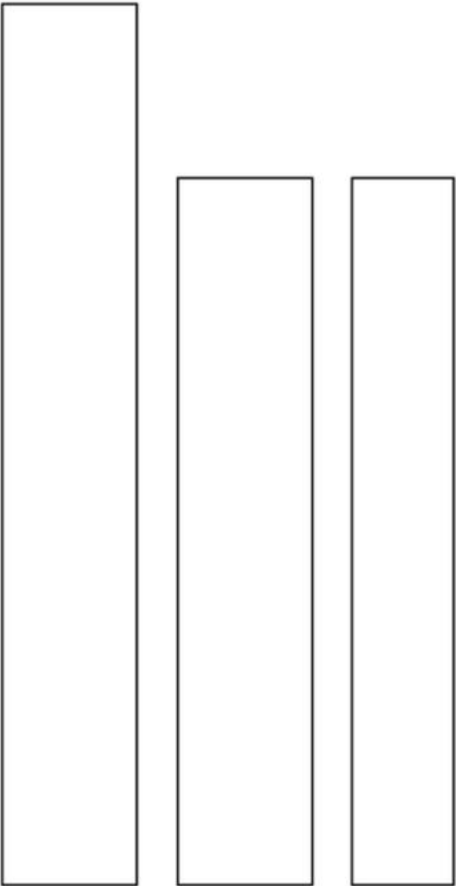

SANDY OAK



**PRO
DETAILING**

SANDY OAK

THICKNESS



SURFACE

EMBOSSED WITH DOUBLE
COAT UV FINISH



BEVEL

FOUR SIDE
MICRO BEVEL



FITTING

STRAIGHT RANDOM



INTERLOCK

100% WATERPROOF
UNICLIC LOCKING




UNDERLAYMENT

IXPE
FOR SILENCE AND COMFORT



SIZES

- 181X1220 MM
- 230X1220 MM
- 230X1524 MM

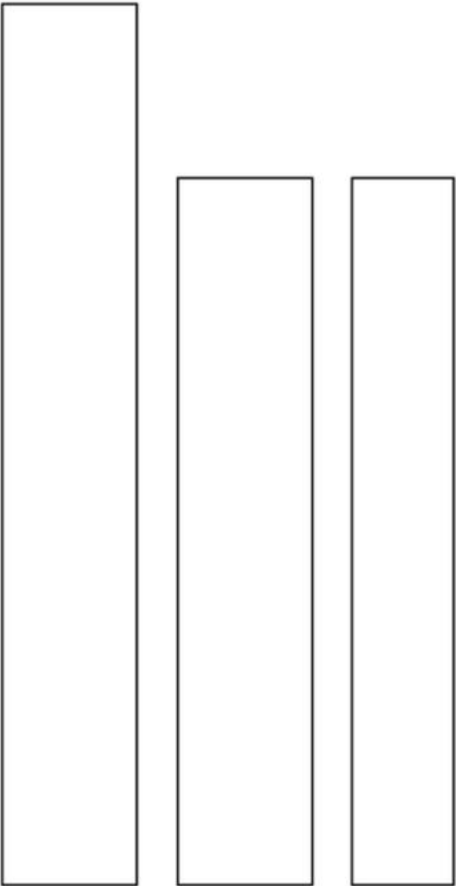

BOSTON NATURAL



BOSTON NATURAL

THICKNESS




SURFACE



BEVEL



FITTING

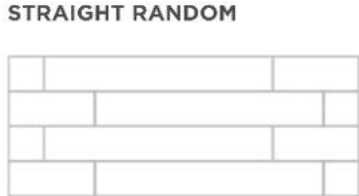

INTERLOCK




UNDERLAYMENT



SIZES

- 181X1220 MM
- 230X1220 MM
- 230X1524 MM

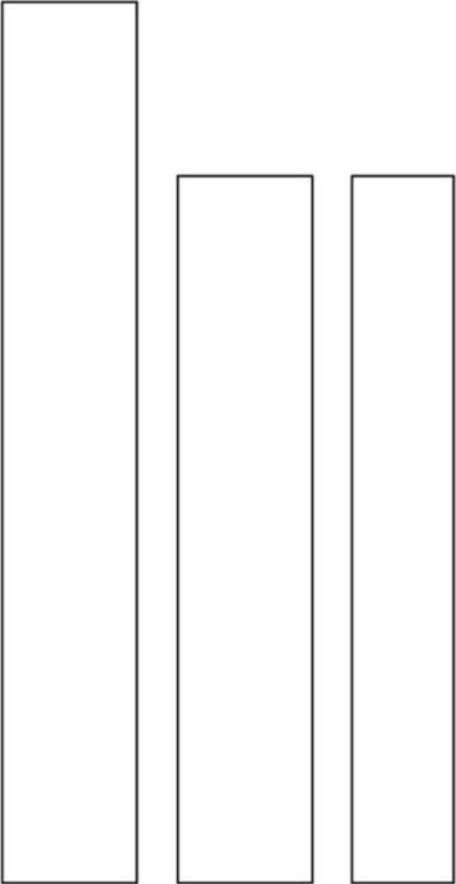

PRO
DETAILING

BLACKJACK OAK



BLACKJACK OAK

THICKNESS



SURFACE

EMBOSSED WITH DOUBLE
COAT UV FINISH



BEVEL

FOUR SIDE
MICRO BEVEL



FITTING

STRAIGHT RANDOM



INTERLOCK

100% WATERPROOF
UNICLIC LOCKING




UNDERLAYMENT

IXPE
FOR SILENCE AND COMFORT



SIZES

- 181X1220 MM
- 230X1220 MM
- 230X1524 MM

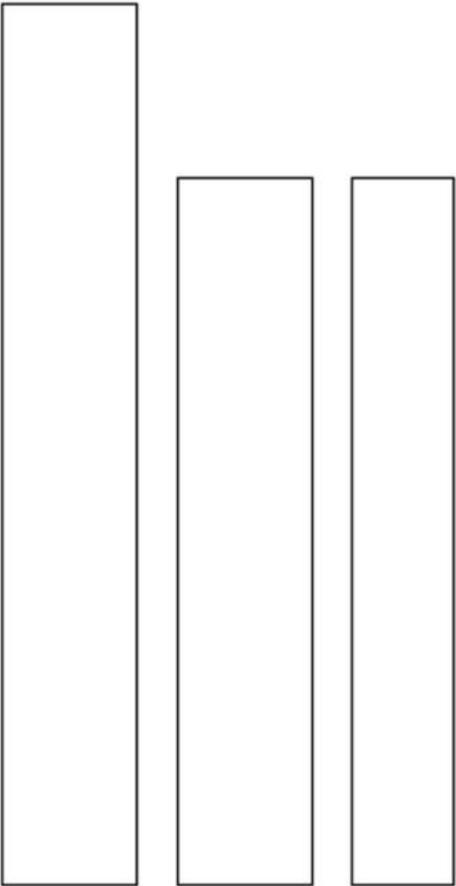

PRO
DETAILING

FANCY OAK



PRO
DETAILING

SIZES

181X1220 MM

● 230X1220 MM

● 230X1524 MM

FANCY OAK

THICKNESS



SURFACE

EMBOSSED WITH DOUBLE
COAT UV FINISH




BEVEL

FOUR SIDE
MICRO BEVEL



FITTING

STRAIGHT RANDOM



INTERLOCK

100% WATERPROOF
UNICLIC LOCKING



UNDERLAYMENT

IXPE
FOR SILENCE AND COMFORT



PARKHURST OAK



PRO
DETAILING

PARKHURST OAK

THICKNESS



SURFACE

EMBOSSED WITH DOUBLE
COAT UV FINISH



BEVEL

FOUR SIDE
MICRO BEVEL



SIZES

- 181X1220 MM
- 230X1220 MM
- 230X1524 MM

FITTING

STRAIGHT RANDOM




INTERLOCK

100% WATERPROOF
UNICLIC LOCKING



UNDERLAYMENT

IXPE
FOR SILENCE AND COMFORT

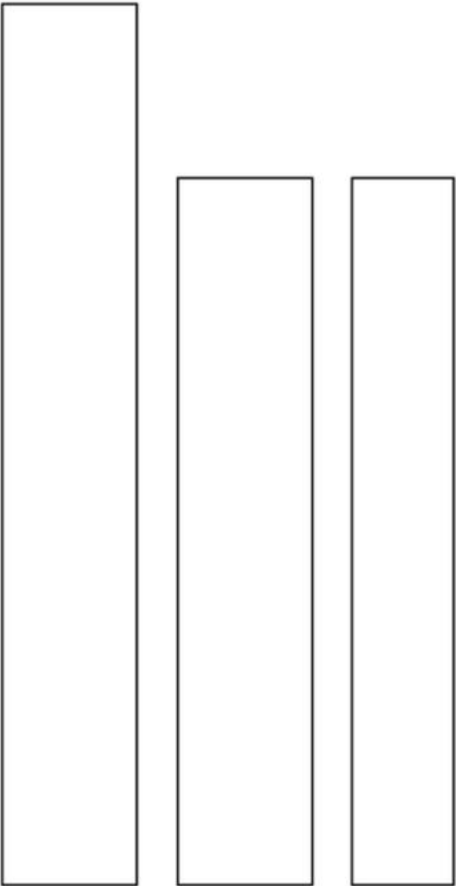

MAPLE BROWN



**PRO
DETAILING**

SIZES

181X1220 MM

● 230X1220 MM

● 230X1524 MM

MAPLE BROWN

THICKNESS



SURFACE

EMBOSSED WITH DOUBLE
COAT UV FINISH



BEVEL

FOUR SIDE
MICRO BEVEL



FITTING

STRAIGHT RANDOM



INTERLOCK

100% WATERPROOF
UNICLIC LOCKING



UNDERLAYMENT

IXPE
FOR SILENCE AND COMFORT



RUSTY BROWN



RUSTY BROWN

THICKNESS




SURFACE



BEVEL



FITTING

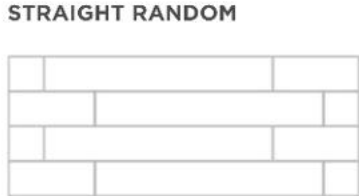

INTERLOCK




UNDERLAYMENT



SIZES

- 181X1220 MM
- 230X1220 MM
- 230X1524 MM

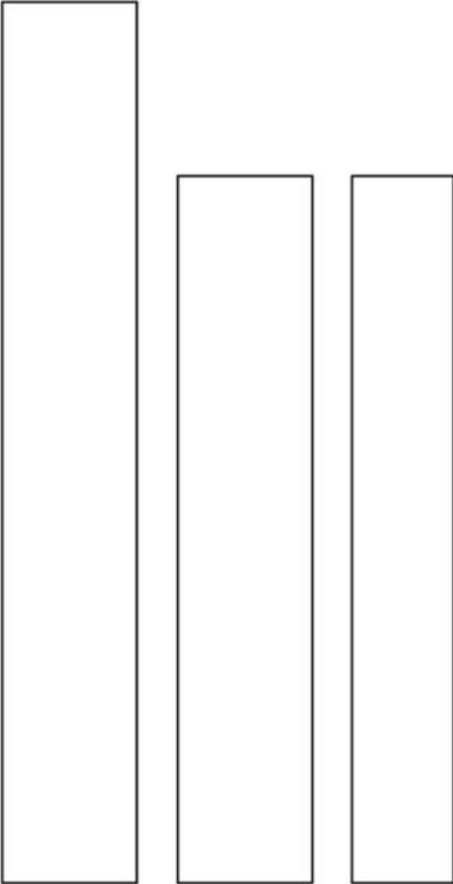

PRO
DETAILING

SESSILE OAK



PRO
DETAILING

SESSILE OAK

THICKNESS



SURFACE

EMBOSSED WITH DOUBLE
COAT UV FINISH



BEVEL

FOUR SIDE
MICRO BEVEL



SIZES

- 181X1220 MM
- 230X1220 MM
- 230X1524 MM

FITTING

STRAIGHT RANDOM





INTERLOCK

100% WATERPROOF
UNICLIC LOCKING



UNDERLAYMENT

IXPE
FOR SILENCE AND COMFORT

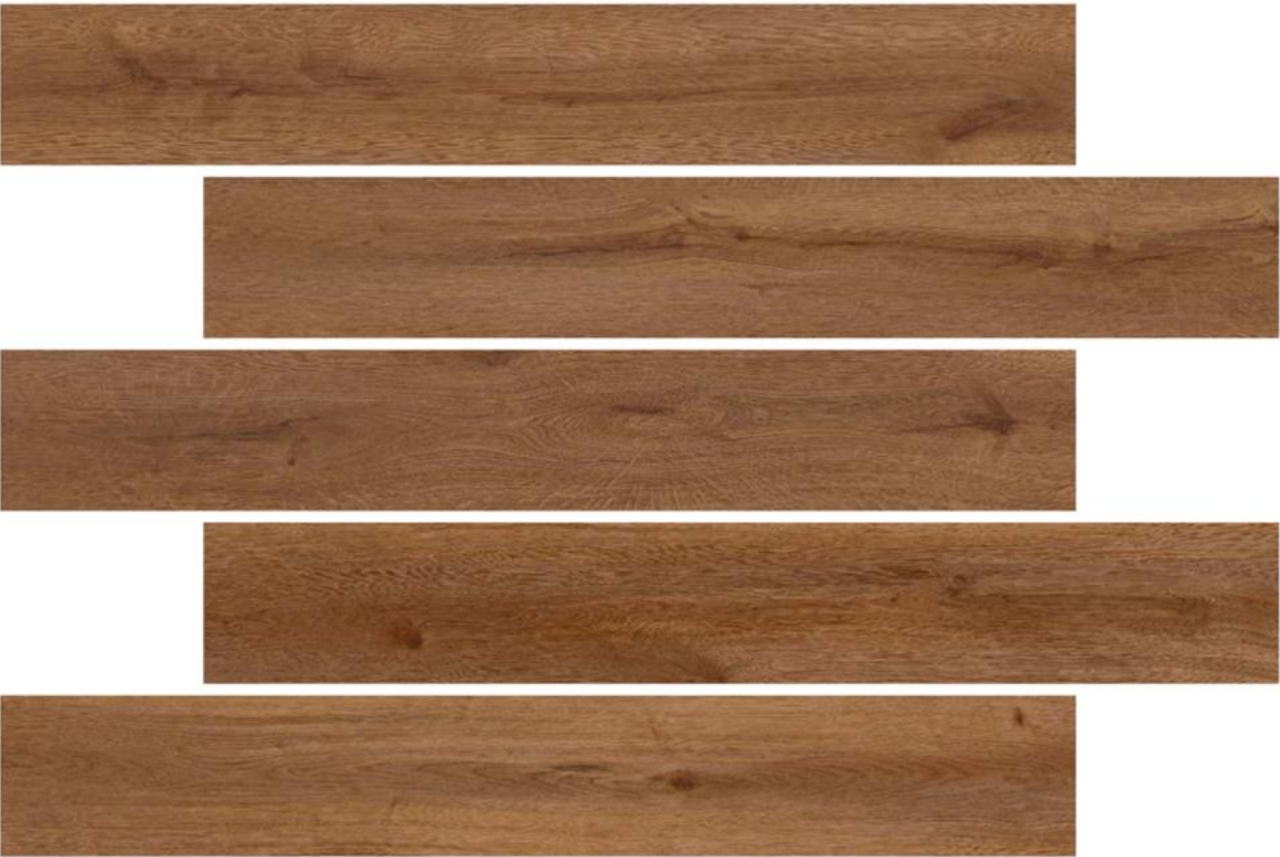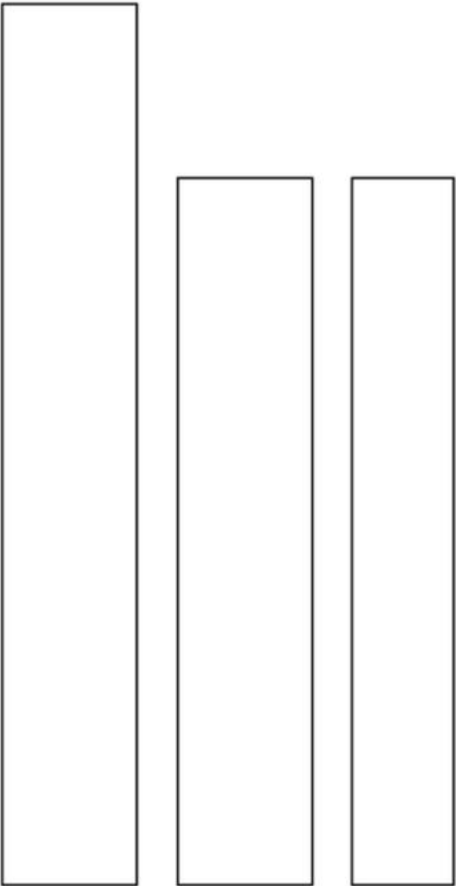

EMORY OAK



PRO
DETAILING

EMORY OAK

THICKNESS



SURFACE

EMBOSSED WITH DOUBLE
COAT UV FINISH



BEVEL

FOUR SIDE
MICRO BEVEL



FITTING

STRAIGHT RANDOM



INTERLOCK

100% WATERPROOF
UNICLIC LOCKING




UNDERLAYMENT

IXPE
FOR SILENCE AND COMFORT



SIZES

- 181X1220 MM
- 230X1220 MM
- 230X1524 MM

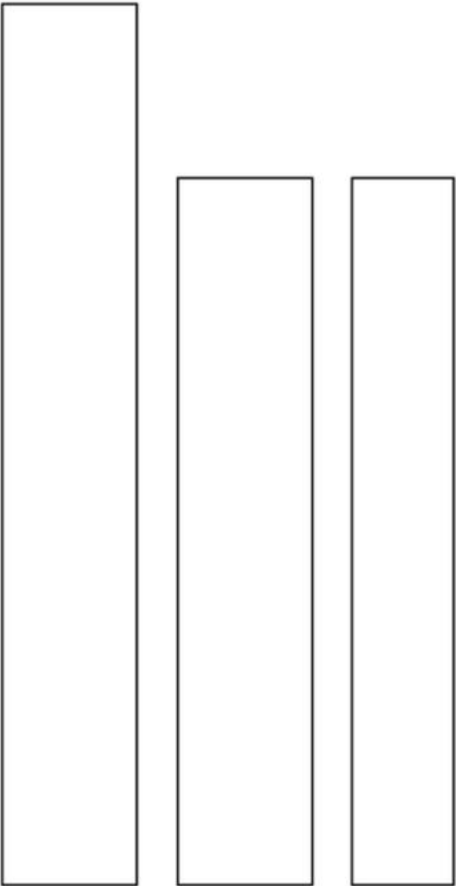



DALLAS BROWN

PRO
DETAILING

DALLAS BROWN

THICKNESS



SURFACE

EMBOSSED WITH DOUBLE
COAT UV FINISH



BEVEL

FOUR SIDE
MICRO BEVEL



SIZES

- 181X1220 MM
- 230X1220 MM
- 230X1524 MM

FITTING

STRAIGHT RANDOM




INTERLOCK

100% WATERPROOF
UNICLIC LOCKING



UNDERLAYMENT

IXPE
FOR SILENCE AND COMFORT

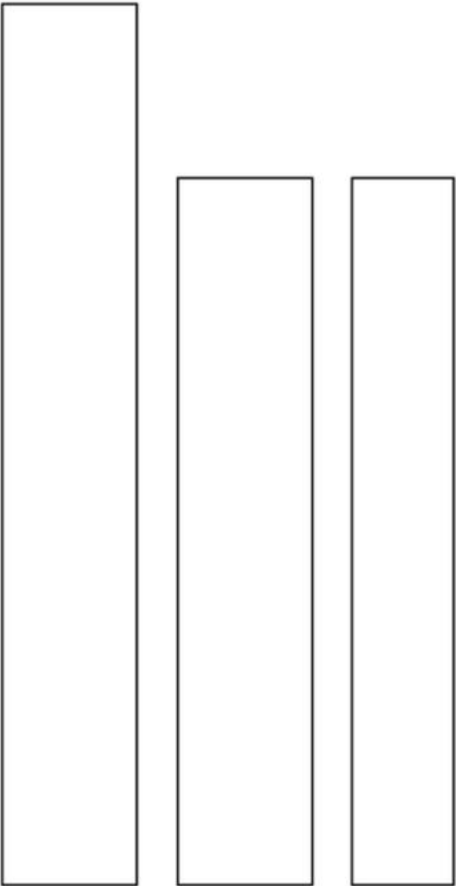

BOSTON GREY



BOSTON GREY

THICKNESS



SURFACE

EMBOSSED WITH DOUBLE
COAT UV FINISH



BEVEL

FOUR SIDE
MICRO BEVEL



FITTING

STRAIGHT RANDOM



INTERLOCK

100% WATERPROOF
UNICLIC LOCKING





UNDERLAYMENT

IXPE
FOR SILENCE AND COMFORT



SIZES

- 181X1220 MM
- 230X1220 MM
- 230X1524 MM

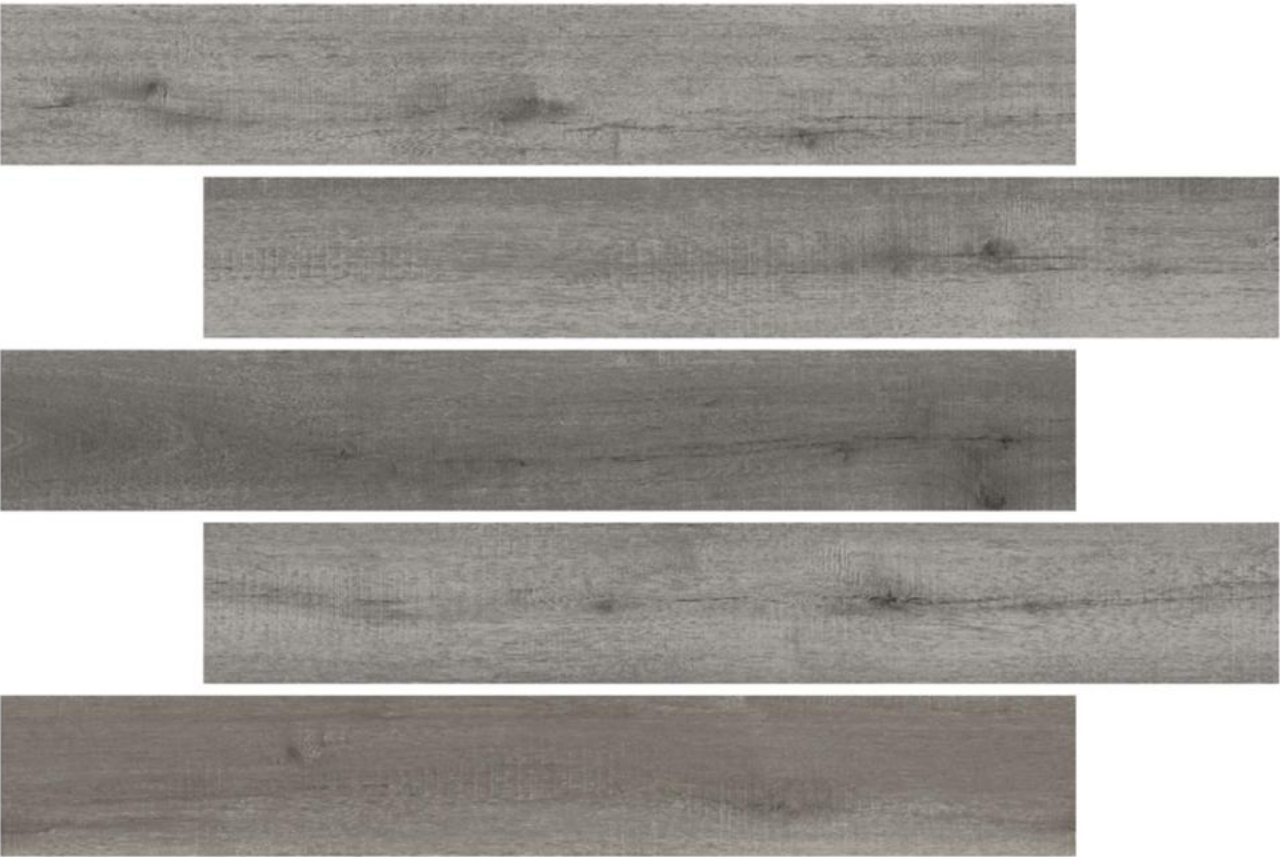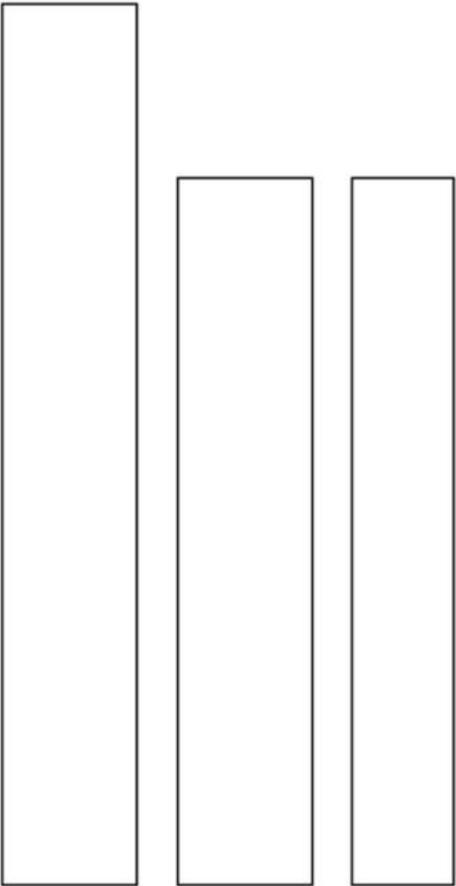

PRO
DETAILING

ASH MIX



ASH MIX

THICKNESS



SURFACE

EMBOSSED WITH DOUBLE
COAT UV FINISH



BEVEL

FOUR SIDE
MICRO BEVEL



FITTING

STRAIGHT RANDOM



INTERLOCK

100% WATERPROOF
UNICLIC LOCKING




UNDERLAYMENT

IXPE
FOR SILENCE AND COMFORT



SIZES

- 181X1220 MM
- 230X1220 MM
- 230X1524 MM

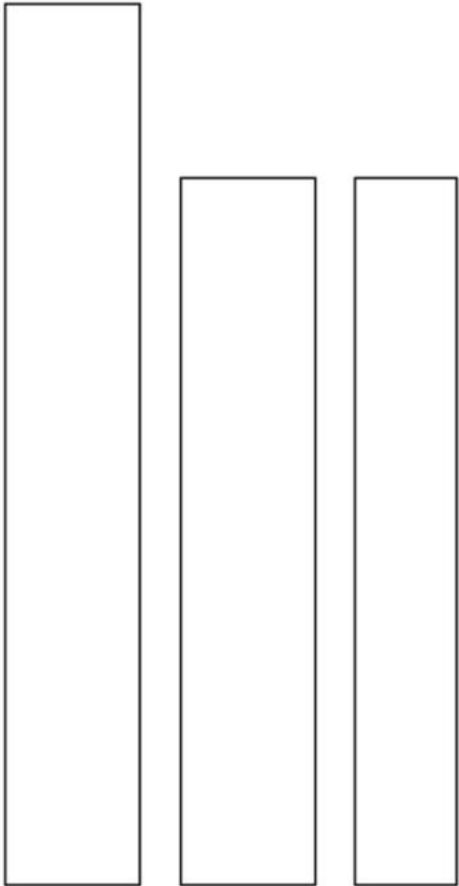

PRO
DETAILING

CHICAGO GRIS



PRO
DETAILING

SIZES

181X1220 MM

● 230X1220 MM

● 230X1524 MM

CHICAGO GRIS

THICKNESS



SURFACE

EMBOSSED WITH DOUBLE
COAT UV FINISH



BEVEL

FOUR SIDE
MICRO BEVEL



FITTING

STRAIGHT RANDOM




INTERLOCK

100% WATERPROOF
UNICLIC LOCKING



UNDERLAYMENT

IXPE
FOR SILENCE AND COMFORT

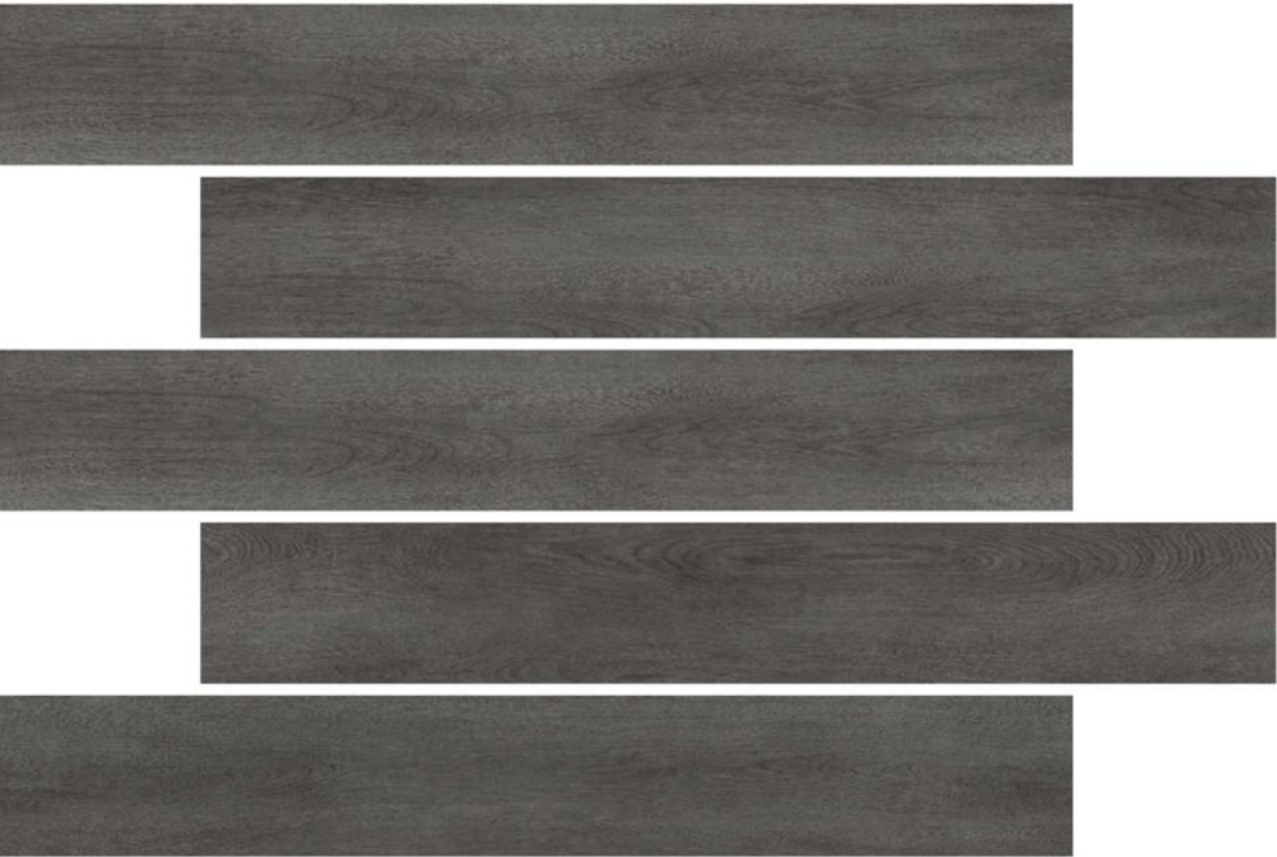

PINE CHARCOAL



PINE CHARCOL

THICKNESS



SURFACE

EMBOSSED WITH DOUBLE
COAT UV FINISH



BEVEL

FOUR SIDE
MICRO BEVEL



FITTING

STRAIGHT RANDOM



INTERLOCK

100% WATERPROOF
UNICLIC LOCKING




UNDERLAYMENT

IXPE
FOR SILENCE AND COMFORT




SIZES

- 181X1220 MM
- 230X1220 MM
- 230X1524 MM

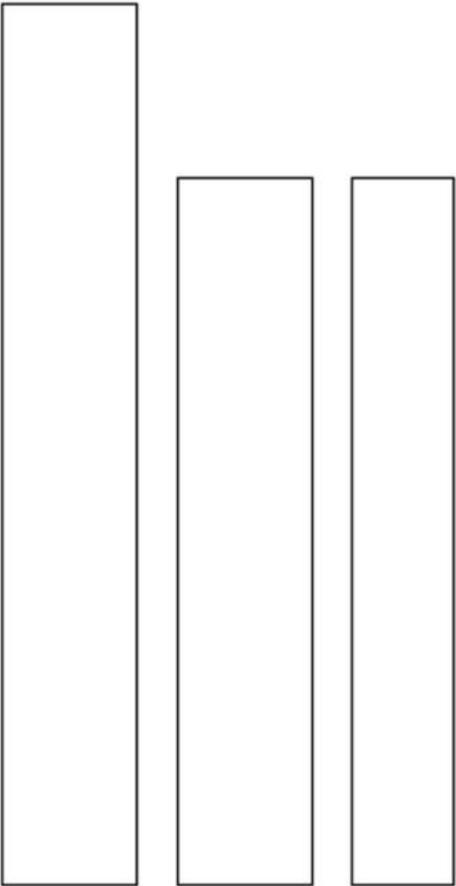


**PRO
DETAILING**

Imperial

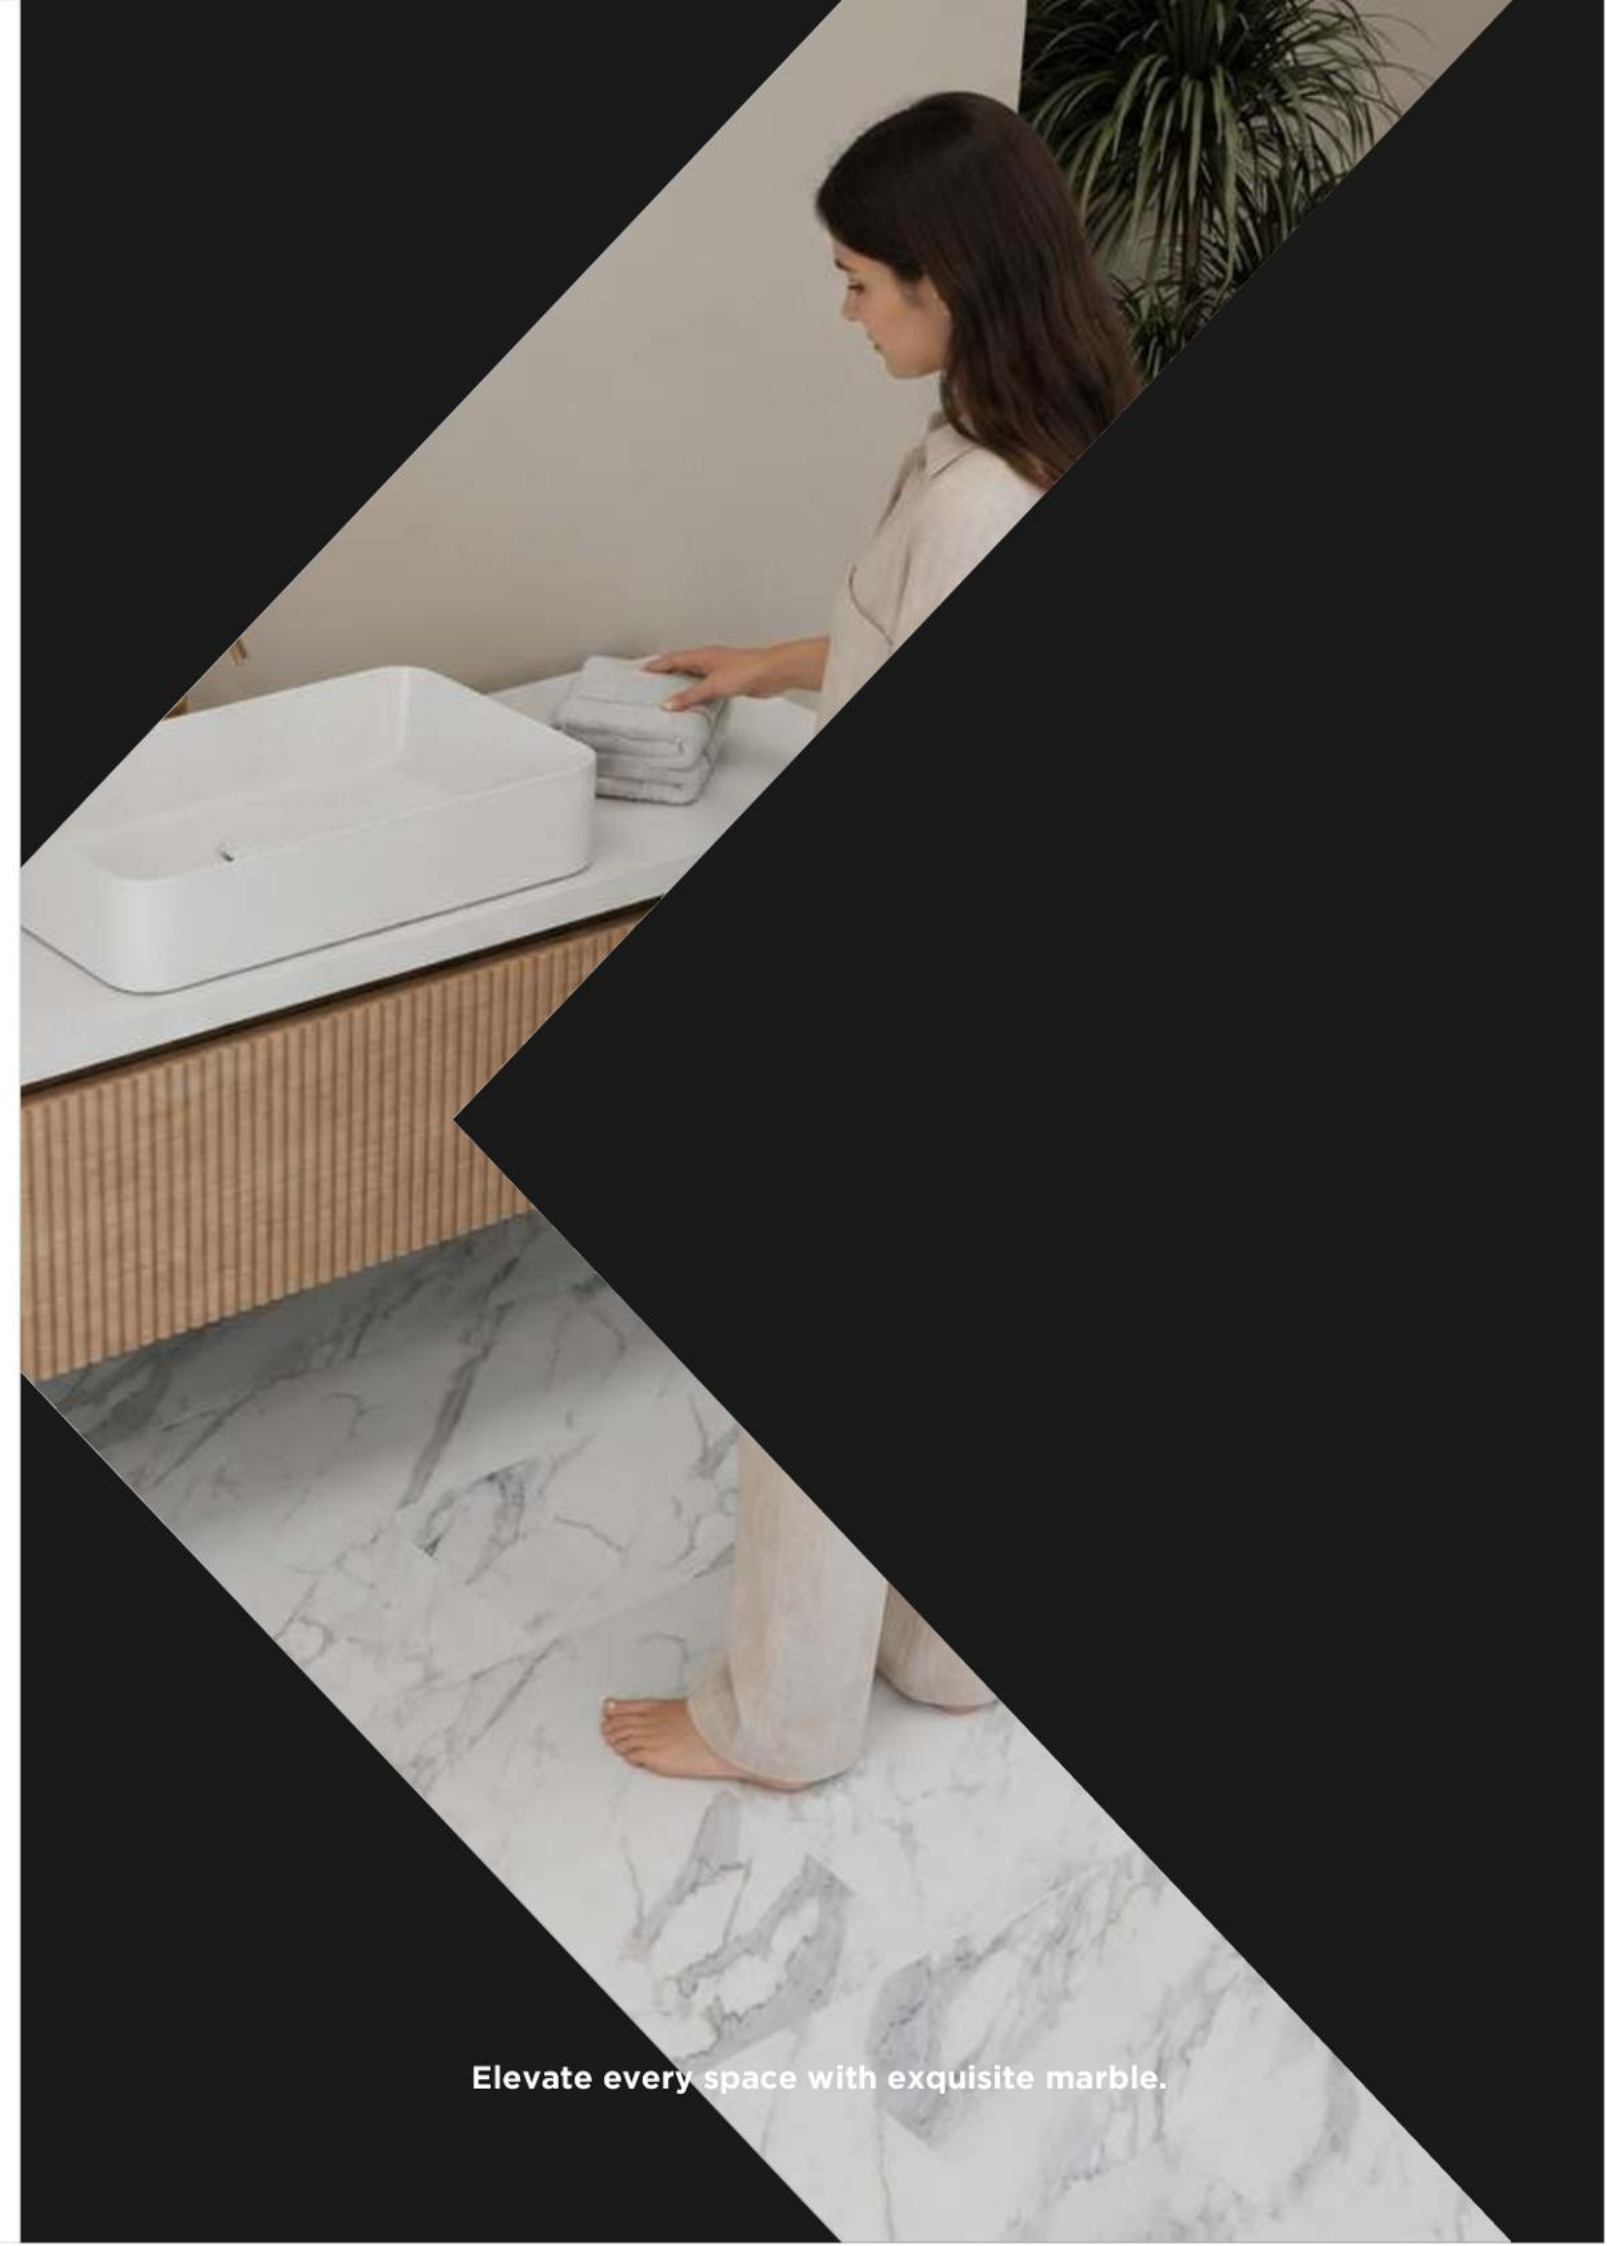


Elevate every space with exquisite marble.

AVAILABLE TILES

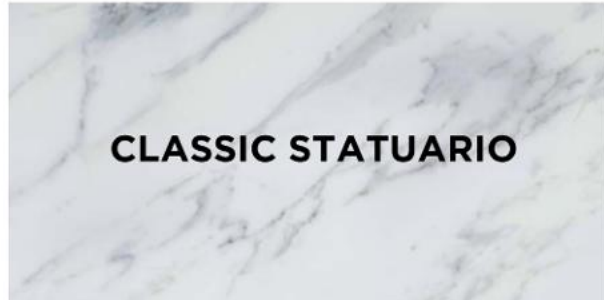

Imperial



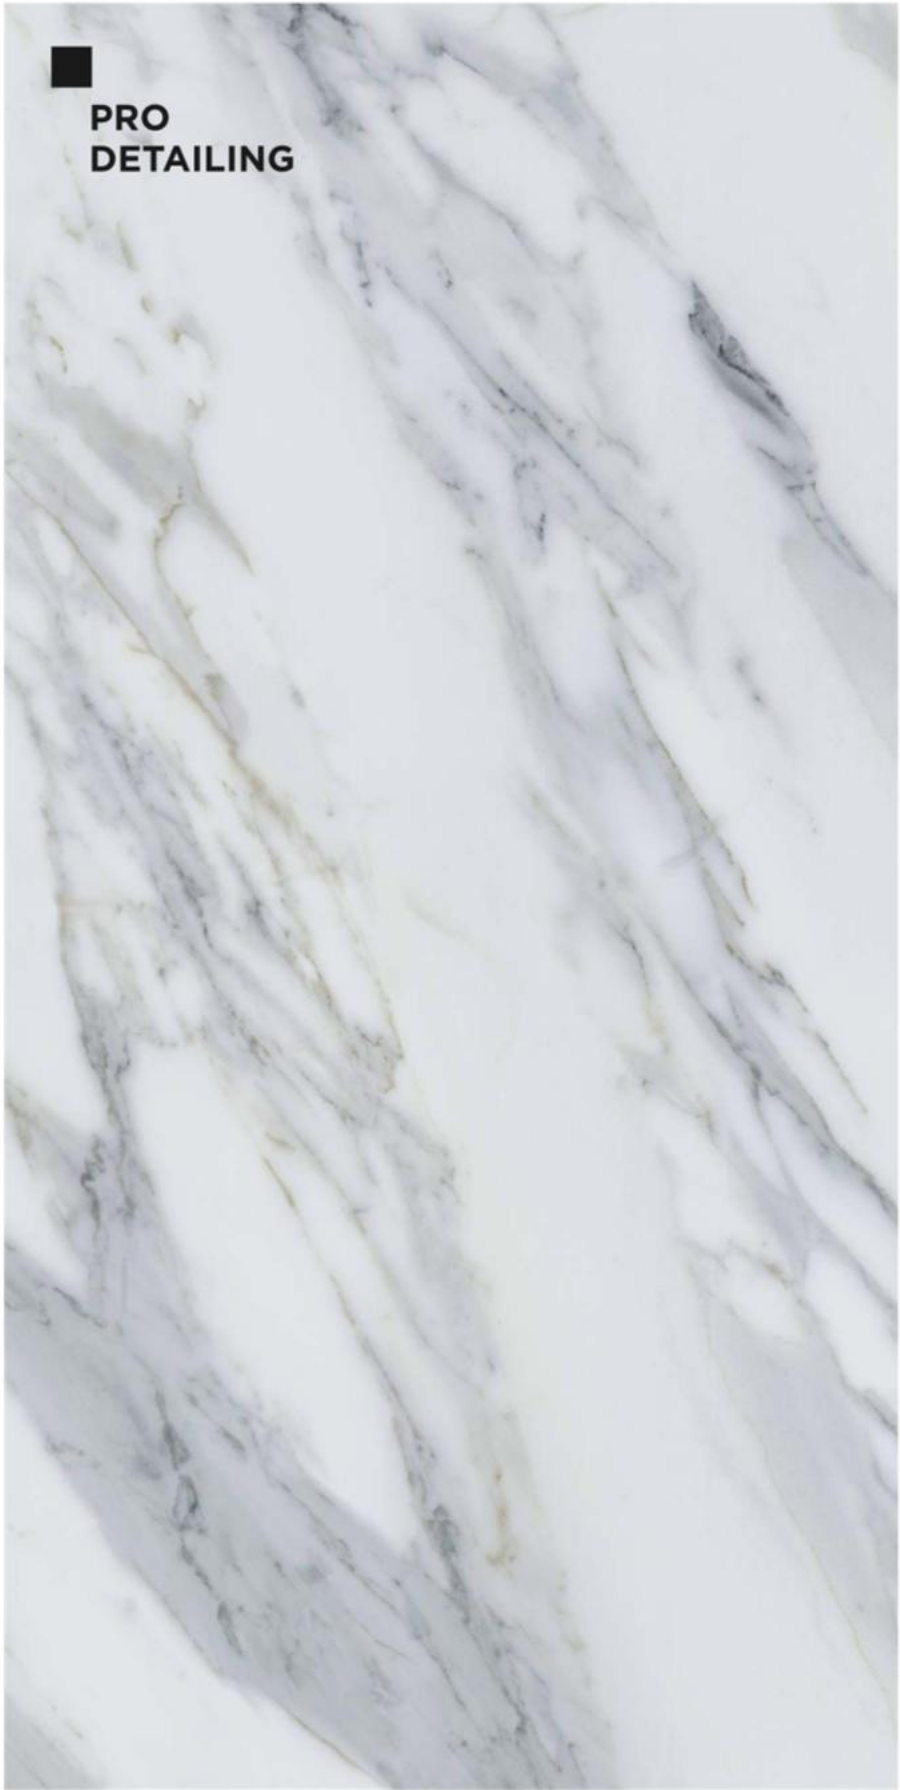

CLASSIC STATUARIO

THICKNESS



SURFACE

DOUBLE COAT UV FINISH




BEVEL

FOUR SIDE MICRO BEVEL



FITTING

STRAIGHT RANDOM



INTERLOCK

100% WATERPROOF UNICLIC LOCKING




UNDERLAYMENT

IXPE FOR SILENCE AND COMFORT



SIZES
305X610 MM



CLASSIC STATUARIO



TECHNICAL DATA

SYMBOL	PARAMETER	TEST STANDARD	SPECIFICATION / CRITERIA	RESULT
	Dimensional Stability	ISO 23999	< 0.10 mm	PASS
	Curling	ISO 23999	< 1 mm	PASS
	Micro scratch resistant	EN 16094	> 25000 Cycle(4N Load), <A2	PASS
	Residual Indentation	ACTME 1914	< 0.10 mm	PASS
	Shore D hardness	ASTM D 2240	> 15 to < 70 HD	PASS
	Scratch Resistance	—	> 6 N	PASS
	Abrasion Resistance	EN 13329	AC4 (> 4000 cycle)	PASS
	Pill strength	EN 24345	> 50 N / 50 mm	PASS
	Locking Strength	ISO 24334	> 250 N / 100 mm	PASS
	Density	ASTM D 792	1.95 TO 2.05 g/cm³	PASS
	Dimensional Variation After change in Relative humidity	EN 13329:2016	Long side <0.9mm Short side <0.9mm	PASS
	Large Ball Impact test	EN 438	1600 mm Height (320 gm load)	PASS



100%
waterproof



Patented interlock
system for
easy installation



Real to
touch texture



No Termite
No Bugs



Excellent
Acoustic



High
Dimensional
Stability



Scratch &
Stain
Resistant



Fire
Retardant




Easy
to Clean




INSTALLATION


Installation is fast and easy thanks to the unique click lock system. Click Lock Technology works perfectly for both the long and short sides of the flooring panel and ensures there are no unwanted gaps or spaces between floorboards.




Start at a corner, tongue side facing wall, with spacers for an 8-12 mm expansion gap.




Assemble the second row on the subfloor, tilt and push to attach to the first row, then click into place.




Insert the second plank's end tongue into the first plank's end groove at an angle, then click into place.




Begin the next row with the last cut-off piece from the previous row



For the last plank of a row, measure, mark, score, and snap off the required length, then insert.




For heating vents, cut the plank to length, measure and mark areas to cut out, then cut allowing for expansion.



Begin the next row with the last cut-off piece from the previous row.



Trim door frames by placing a plank upside down next to the frame and cutting to the necessary height.




PACKING DETAILS

Packing Details - 181x1220 MM

THICKNESS	BOX		PALLET			CONTAINER			
CORE+IXPE	PCS	SQM	BOX	SQM	WT-GROSS	PALLET	BOX	SQM	WT
4+1	10	2.21	75	166	1380	20	1500	3315	27600
5+1.5	08	1.77	75	133	1373	20	1500	2655	26850
6+1.5	07	1.55	75	116	1444	19	1425	2209	27431

**For Other Sizes And Thicknesses Please Contact Us.

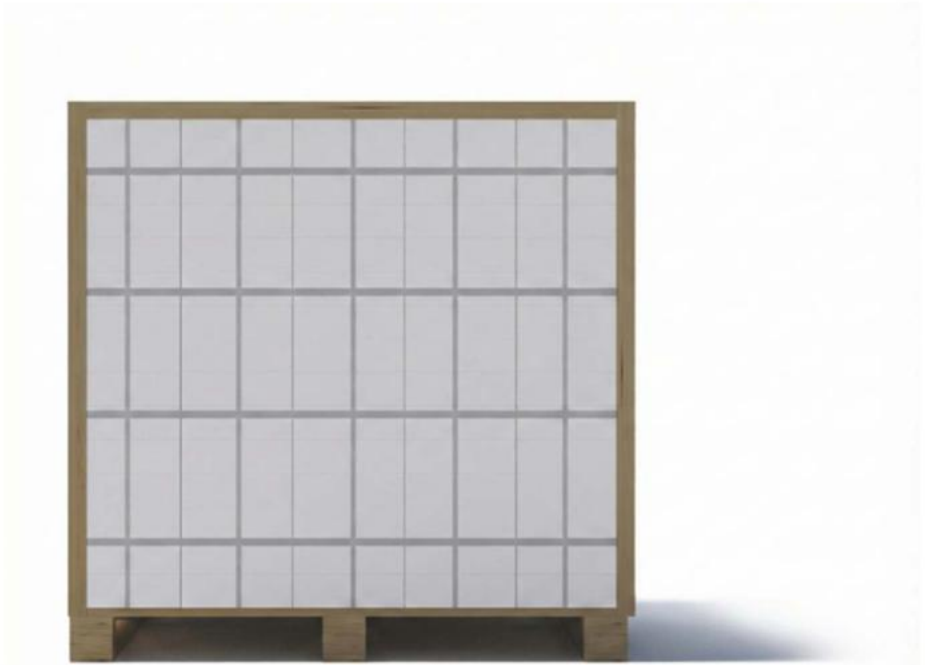

Discover the unmatched uniqueness and exclusiveness with Nexora as we don't compromise on quality of products or packaging.



Reach out to us at:

contact@essen-global.com

USA/CANADA: +1(562)850-6552

INDIA: +91-8487898204



A VENTURE BY: **ESSEN GLOBAL LLP**

www.essen-global.com