

STRONGER MATERIALS | FOR A BETTER RESULTS

PPH





About us

ASVA CORPORATION

The ASVA group specializes in the manufacturing of international quality plastic products and accessories that secure and channel chemical and water for domestic and international commercial and industrial use. Keenly aware that these precious energy resources are the principal drivers of process and development, the group focuses exclusively on device and components that support energy supply.

Launched in 1999, the group began with manufacturing products for chemicals & water industries under the brand name CPI. Once established as the market leader in Pipe Fittings & Valves, the group grew and diversified, adding finely crafted chemical & water distribution accessories to its premium Pipe Product. Today, the group is on the verge of launching an entire range of innovative products to facilitate all industries.

The group has received ISI Mark that certifies consistent quality for its brands, **HDPE/PP/PPH/PVDF PIPE & FITTINGS & BALL VALVES**.

PPH PIPES

PPH - Polypropylene Homopolymer shows a high mechanical strength,


- High impact strength, but a low notched impact strength.
- PP resists stress cracking and it is easy to weld.
- High Thermal and stress, crack Resistance
- Non Toxic, Food grade
- Excellent Chemical Resistance The working temperature ranges between +5°C and 100°C.

Application :

- Metallurgy Plants
- Chemical Industry
- Fluorochemical Industry
- Phosphoric acid plants
- Steel Plants
- Chemical waste treatment plants
- Oil manufacturing plants, Pickling lines

Manufacturing range : 20 mm OD to 400 mm OD

Standards : As Per DIN - 8077 / 78

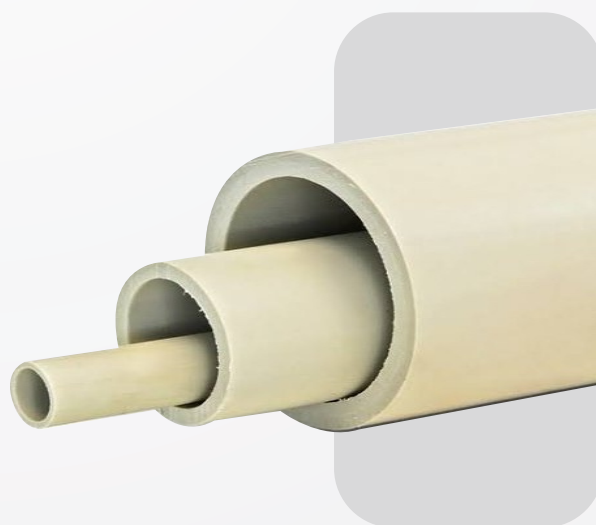



PPH FITTINGS




Short Neck Stub End

Mfg Range : 20 mm OD to 400 mm OD



Long Neck Stub End

Mfg Range : 20 mm OD to 400 mm OD



Slip-on Flange

Mfg Range : 20 mm OD to 400 mm OD




Blind Flange

Mfg Range : 20 mm OD to 400 mm OD



Bend Socket Weld (6 Kg. & 10 Kg.)

Mfg Range : 20 mm OD to 160 mm OD



Tee Socket Weld (6 Kg. & 10 Kg.)

Mfg Range : 20 mm OD to 160 mm OD



Bend (Spigot Type) (6 Kg. & 10 Kg.)

Mfg Range : 63 mm OD to 315 mm OD



Tee (Spigot Type) (6 Kg. & 10 Kg.)

Mfg Range : 63 mm OD to 315 mm OD



Reducing Tee (Socket & But weld)

Mfg Range : 32 mm OD to 315 mm OD



Reducer (Socket & But weld)

Mfg Range : 20 mm OD to 400 mm OD



End Cap (Socket & But weld)

Mfg Range : 20 mm OD to 400 mm OD



Tail Piece

Mfg Range : 32 mm OD to 315 mm OD



Core Flange

Mfg Range : 32 mm OD to 160 mm OD



PPH Sandwich Flange

Mfg Range : 20 mm OD to 315 mm OD



PPH Coupler

Mfg Range : 20 mm OD to 160 mm OD



PPH Union

Mfg Range : 20 mm OD to 63 mm OD

OUR PRODUCT



Valves



HDPE (PIPE & FITTINGS)



ENGINEERING PRODUCT



PP (PIPE & FITTINGS)



PPH (PIPE & FITTINGS)



ASVA Corporation

Correspondence add :
6, Satya Estate Near Shreenath Estate,
B/h. Shahwadi Village, Narolgam, Ahmedabad, Gujarat 382405, India
C : +91 98250 16263 W : +91 90990 33179
U : www.acindia.in E : info@acindia.in, sales@acindia.in